



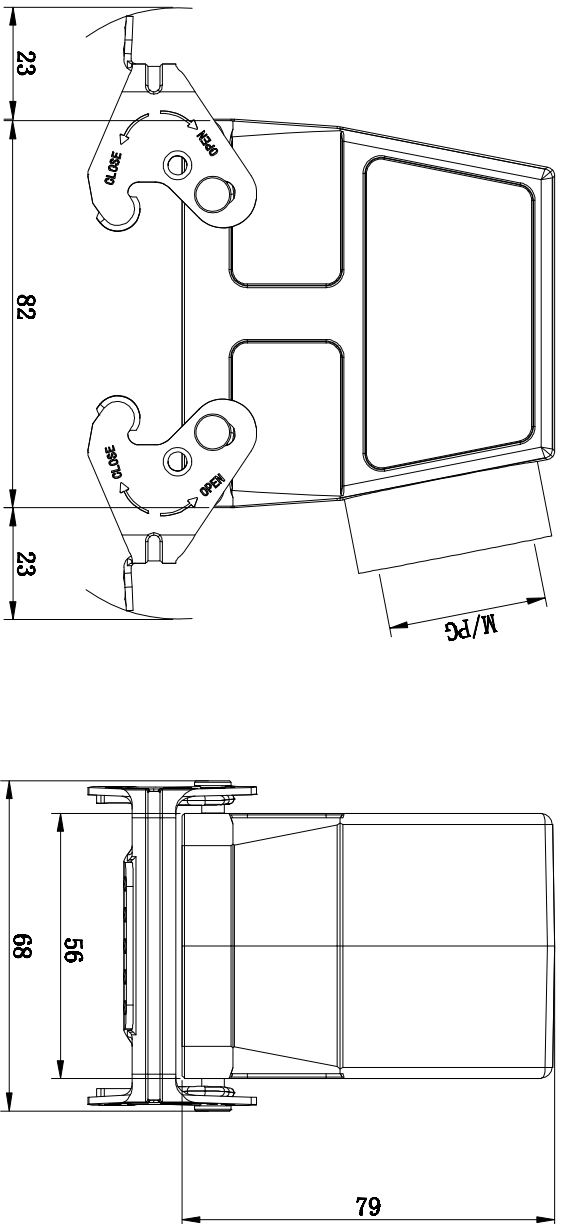

REV	E.C.N NO.	CONTENT	CHK	DATE
Type			Thread size (M/Pg)	
UL0-HC04-H32A-SEH-2L-M32			M32	
UL0-HC04-H32A-SEH-2L-PG21			PG21	
UL0-HC04-H32A-SEH-2L-PG29			PG29	

Technical specification:

1. Material: Aluminium die-cast
2. Surface: powder-coated
3. Colour: (grey)
4. Temperature range: -40℃ – +125℃
5. Degree of Protection: IP65
6. (acc. to IEC 60529 for coupled connector)
- Locking element:
locking type: Double locking latch
material: metal galvanized/nickel plating
7. Cable entry: side entry
8. Thread size: M/Pg

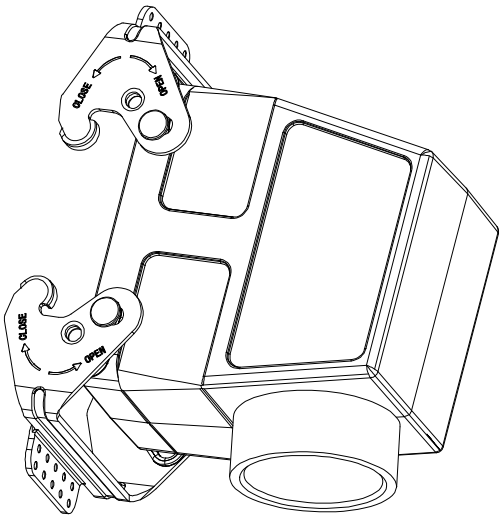

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL		NOTE
DWG.	SWL	DATE	2023.12.9	UNITS	MM	SHEET/OF 1 / 1
CHK.	DATE			SCALE	1:1	A4
APP.	DATE			NAME	UL0-HC04-H32A-SEH-2L-XX	
NINGBO UL0 ELECTRONICS CO.,LTD.						
宁波欧路电子有限公司						
DWGNO.						