



Type	Thread size (M/Pg)
UL0-HC09-H32B-OCT-2L-M32	M32
UL0-HC09-H32B-OCT-2L-M40	M40
UL0-HC09-H32B-OCT-2L-M50	M50
UL0-HC09-H32B-OCT-2L-PG29	PG29
UL0-HC09-H32B-OCT-2L-PG36	PG36
UL0-HC09-H32B-OCT-2L-PG42	PG42

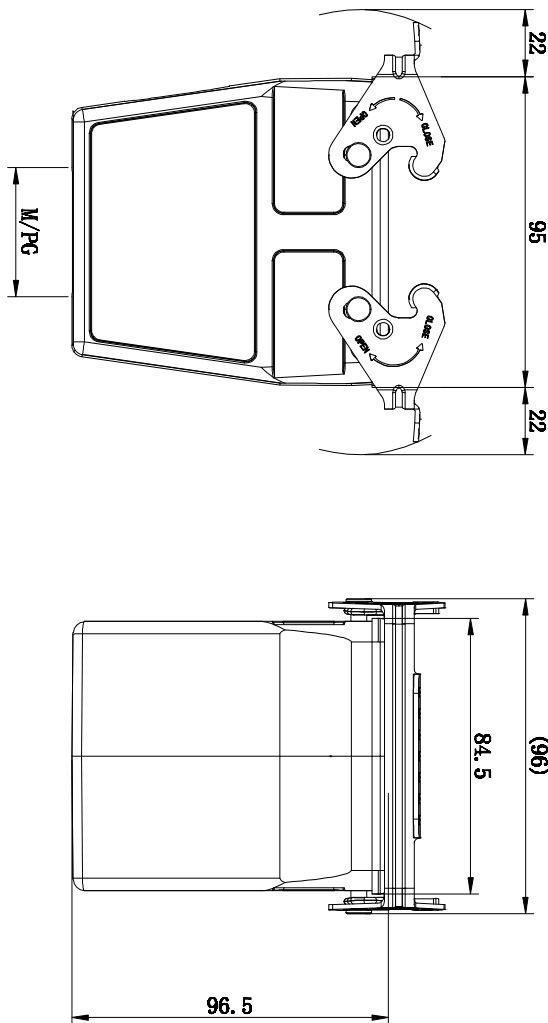

Technical specification:

1. Material: Aluminium die-cast
2. Surface: powder-coated
3. Colour: (grey)
4. Temperature range: -40℃ - +125℃
5. Degree of Protection: IP65
(acc. to IEC 60529 for coupled connector)
6. Locking element:
locking type: double locking latch
material: metal galvanized/nickel plating
7. Cable entry: top entry
8. Thread size: M/Pg
9. Hoods/Housings sealing: NBR

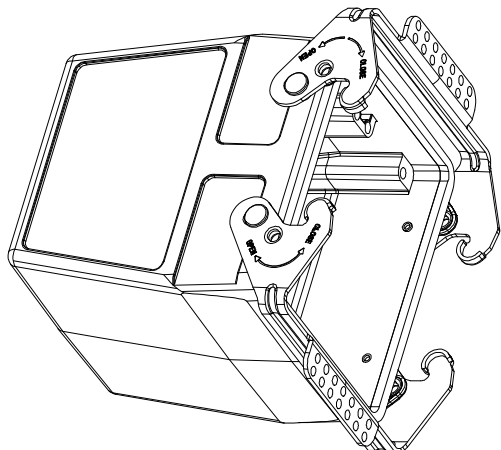

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	2023.12.9	UNITS	MM
CHK.	DATE	SCALE	1:1	A4	1/1
APP.	DATE	NAME	UL0-HC09-H32B-OCT-2L-XX		
NINGBO UL0 ELECTRONICS CO.,LTD.			DWGNO.		
宁波欧路电子有限公司					