



Type	Thread size (M/PG)
UL0-HC09-H32B-SF-2L-M32	M32
UL0-HC09-H32B-SF-2L-2M32	2M32
UL0-HC09-H32B-SF-2L-M40	M40
UL0-HC09-H32B-SF-2L-2M40	2M40
UL0-HC09-H32B-SF-2L-PG29	PG29
UL0-HC09-H32B-SF-2L-2PG29	2PG29
UL0-HC09-H32B-SF-2L-PG36	PG36
UL0-HC09-H32B-SF-2L-2PG36	2PG36
UL0-HC09-H32B-SF-2L-PG42	PG42
UL0-HC09-H32B-SF-2L-2PG42	2PG42

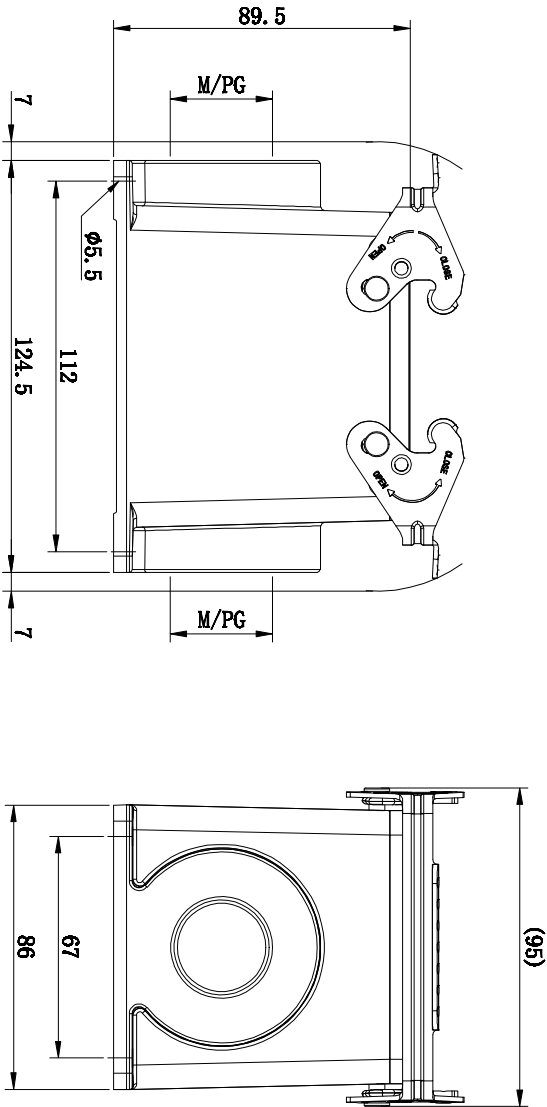

Technical specification:

1. Material: Aluminium die-cast
2. Surface: powder-coated
3. Colour: (grey)
4. Temperature range: -40°C - $+125^{\circ}\text{C}$
5. (acc. to IEC 60529 for coupled connector)
6. Locking element:
locking type: double locking latch
material: metal galvanized/nickel plating
7. Cable entry: side entry
8. Thread size: M/PG
9. Hoods/Housings sealing: NBR

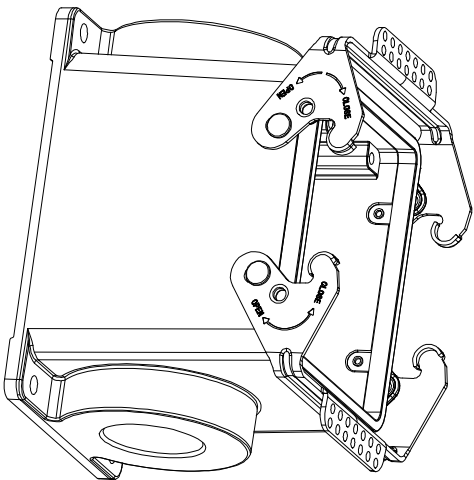

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	2023.12.9	UNITS	MM
CHK.	DATE	SCALE	1:1	A4	1/1
APP.	DATE	NAME	UL0-HC09-H32B-SF-2L-XX		
NINGBO UL0 ELECTRONICS CO.,LTD.					
宁波欧路电子有限公司					
DWGNO.					