



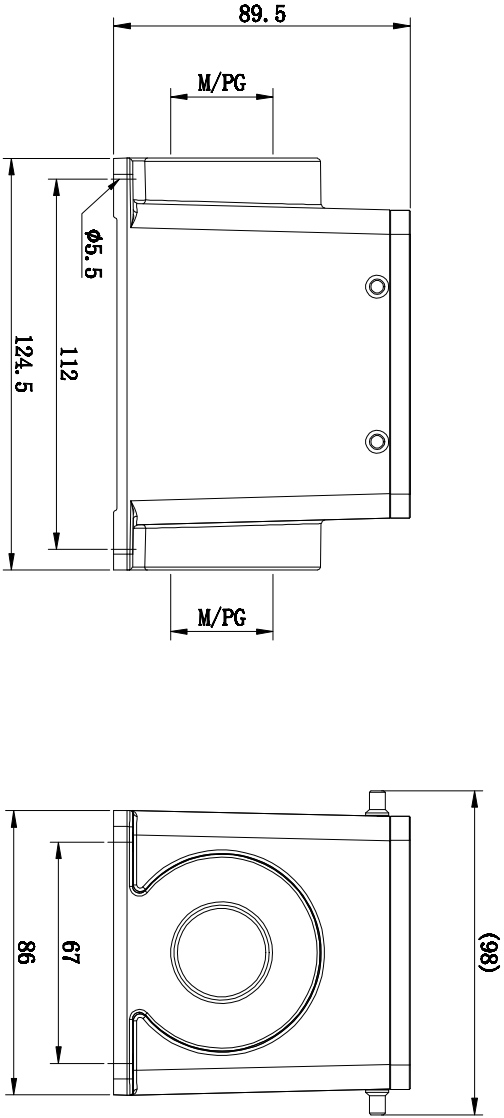

REV	E.C.N NO.	CONTENT	CHK	DATE
Type			Thread size (M/PG)	
UL0-HC09-H32B-SF-4B-M32			M32	
UL0-HC09-H32B-SF-4B-2M32			2M32	
UL0-HC09-H32B-SF-4B-M40			M40	
UL0-HC09-H32B-SF-4B-2M40			2M40	
UL0-HC09-H32B-SF-4B-PG29			PG29	
UL0-HC09-H32B-SF-4B-2PG29			2PG29	
UL0-HC09-H32B-SF-4B-PG36			PG36	
UL0-HC09-H32B-SF-4B-2PG36			2PG36	
UL0-HC09-H32B-SF-4B-PG42			PG42	
UL0-HC09-H32B-SF-4B-2PG42			2PG42	

Technical specification:

- 1. Material: Aluminium die-cast
- 2. Surface: powder-coated
- 3. Colour: (grey)
- 4. Temperature range: -40℃ - +125℃
- 5. Degree of Protection: IP65 (acc. to IEC 60529 for coupled connector)
- 6. Cable entry: side entry
- 7. Thread size: M/PG
- 8. Hoods/Housings sealing: NBR

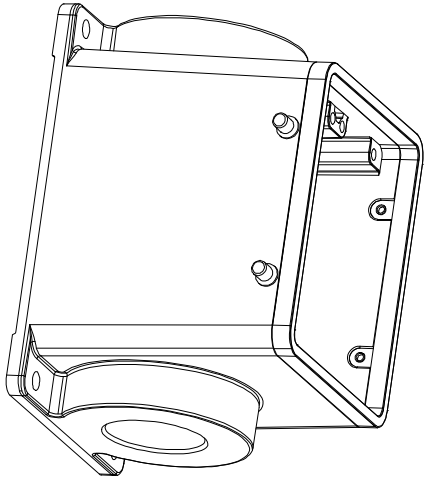

	ITEM	NAME OF PART		NO. OF PART	Q'TY	MATERIAL		NOTE	
	DWG.	SWL	DATE	2023.12.9	UNITS	MM	SHEET/OF	1 / 1	
	CHK.		DATE		SCALE	1:1	A4		
	APP.		DATE		NAME				
NINGBO ULO ELECTRONICS CO.,LTD.					UL0-HC09-H32B-SF-4B-XX				
宁波欧路电子有限公司					DWGNO.				