



REV	E.C.N NO.	CONTENT	CHK	DATE
Type			Thread size (M/PG)	
UL0-HC09-H32B-SE-2B-M32			M32	
UL0-HC09-H32B-SE-2B-M40			M40	
UL0-HC09-H32B-SE-2B-M50			M50	
UL0-HC09-H32B-SE-2B-PG29			PG29	
UL0-HC09-H32B-SE-2B-PG36			PG36	
UL0-HC09-H32B-SE-2B-PG42			PG42	

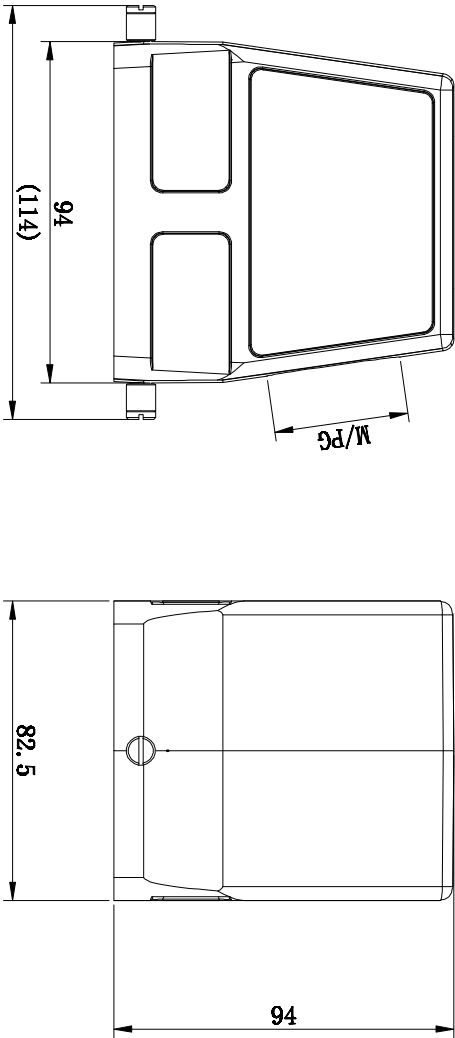

- Technical specification:**
1. Material: Aluminium die-cast
 2. Surface: powder-coated
 3. Colour: (grey)
 4. Temperature range: -40℃ - +125℃
 5. Degree of Protection: IP65
(acc. to IEC 60529 for coupled connector)
 6. Cable entry: side entry
 7. Thread size: M/PG

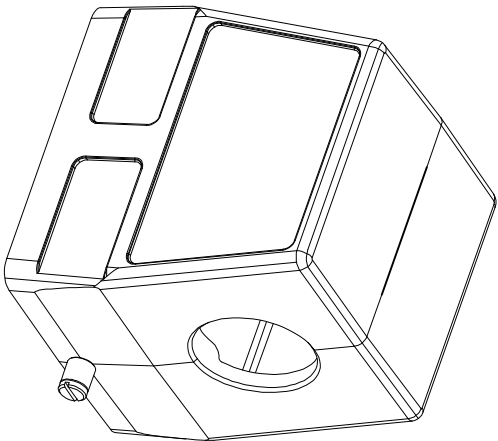

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	2023.12.9	UNITS	MM
CHK.	DATE	SCALE	1:1	A4	1/1
APP.	DATE	NAME	UL0-HC09-H32B-SE-2B-XX		
NINGBO UL0 ELECTRONICS CO.,LTD.				DWGNO.	