
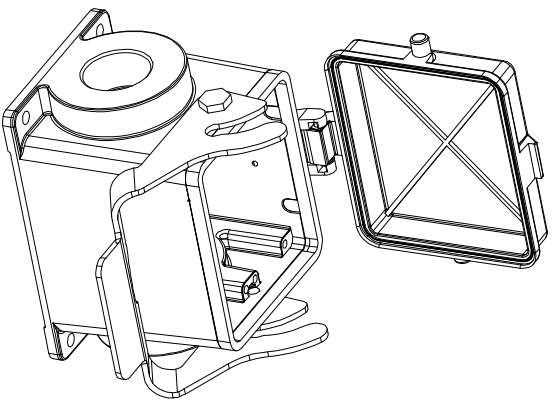
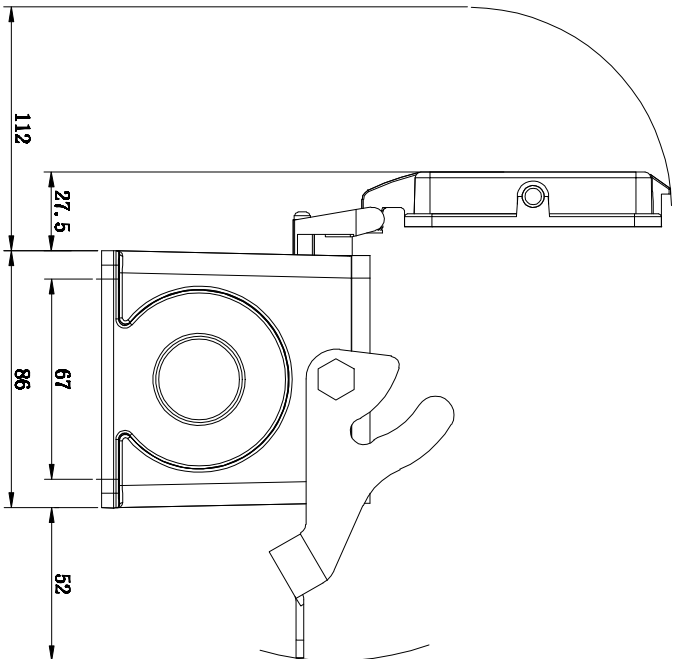


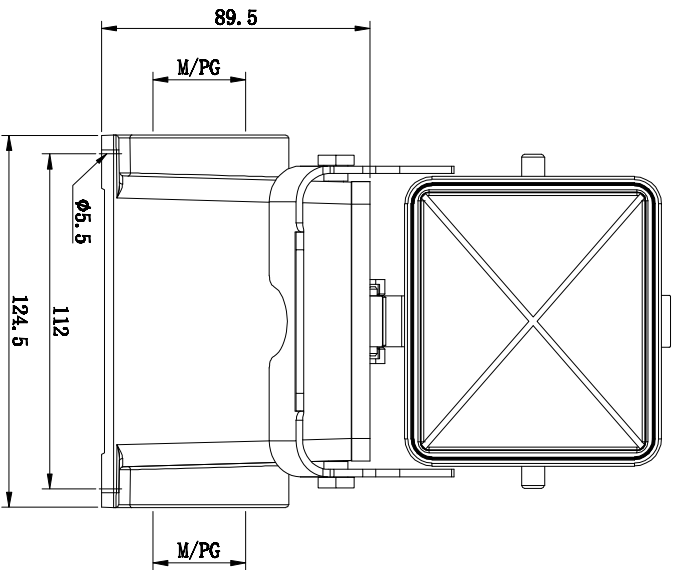

REV	E.C.N. NO.	CONTENT	CHK	DATE
Type			Thread size (M/PG)	
UL0-HC09-H32B-SF-1L-CV-M32			M32	
UL0-HC09-H32B-SF-1L-CV-2M32			2M32	
UL0-HC09-H32B-SF-1L-CV-M40			M40	
UL0-HC09-H32B-SF-1L-CV-2M40			2M40	
UL0-HC09-H32B-SF-1L-CV-PG29			PG29	
UL0-HC09-H32B-SF-1L-CV-2PG29			2PG29	
UL0-HC09-H32B-SF-1L-CV-PG36			PG36	
UL0-HC09-H32B-SF-1L-CV-2PG36			2PG36	

Technical specification:

1. Material: Aluminium die-cast
2. Material, coverl: PC
3. Surface: powder-coated
4. Colour: (grey)
5. Temperature range: -40°C - +125°C
6. Degree of Protection: IP65
(acc. to IEC 60529 for coupled connector)
7. Locking element:
locking type: single locking latch
material: metal galvanized/nickel plating
8. Cable entry: side entry
9. Thread size: M/PG
10. Hoods/Housings sealing: NBR

ITEM	NAME OF PART	NO. OF PART	Q-TY	MATERIAL	NOTE
DWG.	SWL	DATE	2023.12.9	UNITS	MM
CHK.	DATE	SCALE	1:1	A4	1/1
APP.	DATE	NAME	UL0-HC09-H32B-SF-1L-CV-XX		
NINGBO UL0 ELECTRONICS CO.,LTD.			DWGNO.		
宁波欧路电子有限公司					