



REV	E.C.N NO.	CONTENT	CHK	DATE
		Type	Thread size (M/PG)	
		UL0-HC09-H32B-SF-1L-M32	M32	
		UL0-HC09-H32B-SF-1L-2M32	2M32	
		UL0-HC09-H32B-SF-1L-M40	M40	
		UL0-HC09-H32B-SF-1L-2M40	2M40	
		UL0-HC09-H32B-SF-1L-PG29	PG29	
		UL0-HC09-H32B-SF-1L-2PG29	2PG29	
		UL0-HC09-H32B-SF-1L-PG36	PG36	
		UL0-HC09-H32B-SF-1L-2PG36	2PG36	

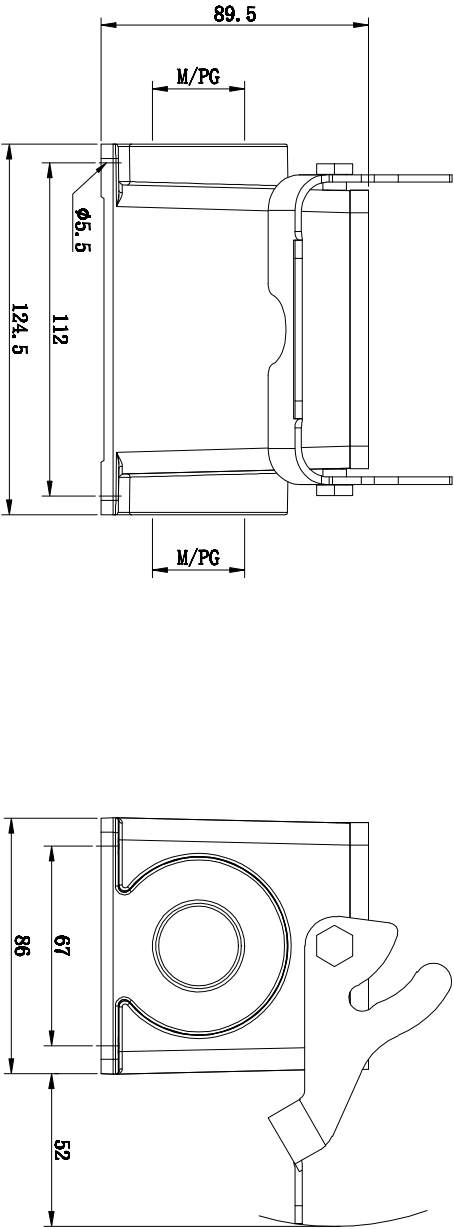

Technical specification:

1. Material: Aluminium die-cast
2. Surface: powder-coated
3. Colour: (grey)
4. Temperature range: -40℃ - +125℃
5. Degree of Protection: IP65
(acc. to IEC 60529 for coupled connector)
6. Locking element:
locking type: single locking latch
material: metal galvanized/nickel plating
7. Cable entry: side entry
8. Thread size: M/PG
9. Hoods/Housings sealing: NBR

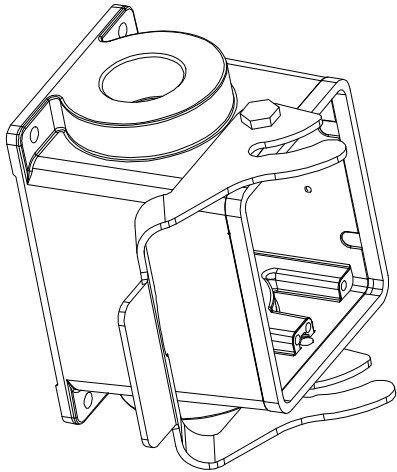

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	2023.12.9	UNITS	MM
CHK.	DATE			SCALE	1:1
APP.	DATE				A4
				NAME	UL0-HC09-H32B-SF-1L-XX
				DWGNO.	