

		2		1	
REV	E.C.N NO.	CONTENT	CHK	DATE	

NOTES:

UL Standard

1

	B	C	D
Use group			
Rated Current	20A	—	10A
Rated Voltage	300V	—	300

2. Wire range: 12~22AWG

IEC Standard

1

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(kV)	6.0k
Rate Voltage(V)	250
Rate Current(A)	24A

2. Wire range: 0.5-4.0mm²

NOTES:

1.Housing: PA66(UL94V-0)

2.5Screw: SteelM2.5/Zn Plated)

3. Block: PA66(Ni Plated)

4. Cover: PA66(UL94V-0)

5. Clamp: Phosphor Bronze (In Plated),

NOTES3

1.Pitch: 9.5mm Poles: 02-24F

2. Operating temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

3. RoHS Compliance

How to order

UL0-TB42 - 46S/B - XXP - Y 100A

Certificate Factory poles

Series NO.	Code
------------	------

Customer requirements

— color

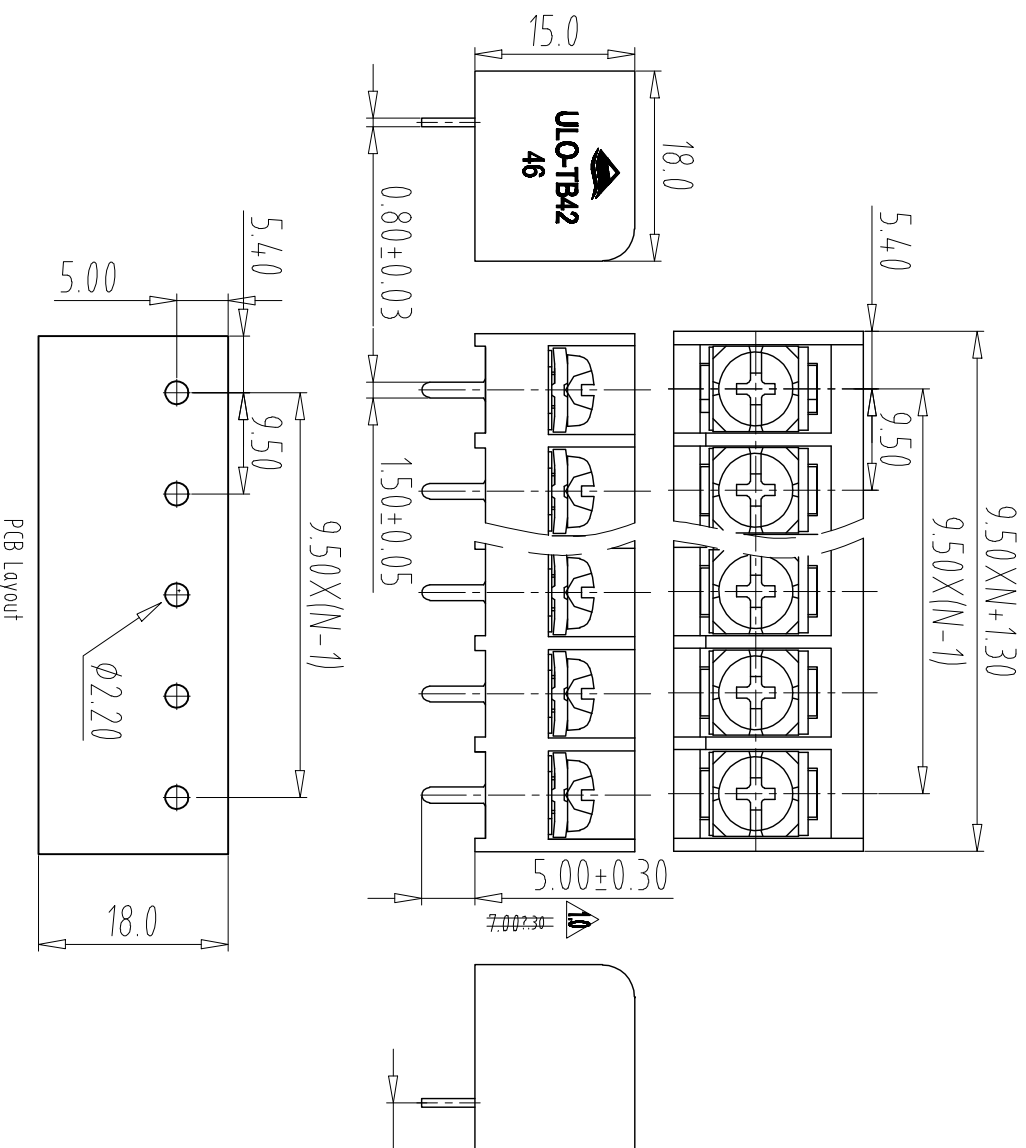
1:Grey 6:Red

2:Blue 7:transparent

3:Black 8:Yellow

4:Green 9:White

5:0range

[illegible]

ITEM	NAME OF PART		NO. OF PART	Q-TY	MATERIAL		NOTE
DWG.	L Z W	DATE	21.06.16		UNITS	MM	1/1
CHK.		DATE			SCALE	1 : 1	
APP.		DATE					

NINGBO ULO ELECTRONICS CO.,LTD
宁波欧路电子有限公司

DWGNO.	ULOTB42Y100A
--------	--------------