



REV	E.C.N NO.	CONTENT	CHK	DATE
		Type	Thread size (M/Pg)	
		UL0-HC10-H48B-SE-2B-M32	M32	
		UL0-HC10-H48B-SE-2B-M40	M40	
		UL0-HC10-H48B-SE-2B-M50	M50	
		UL0-HC10-H48B-SE-2B-PG29	PG29	
		UL0-HC10-H48B-SE-2B-PG36	PG36	
		UL0-HC10-H48B-SE-2B-PG42	PG42	

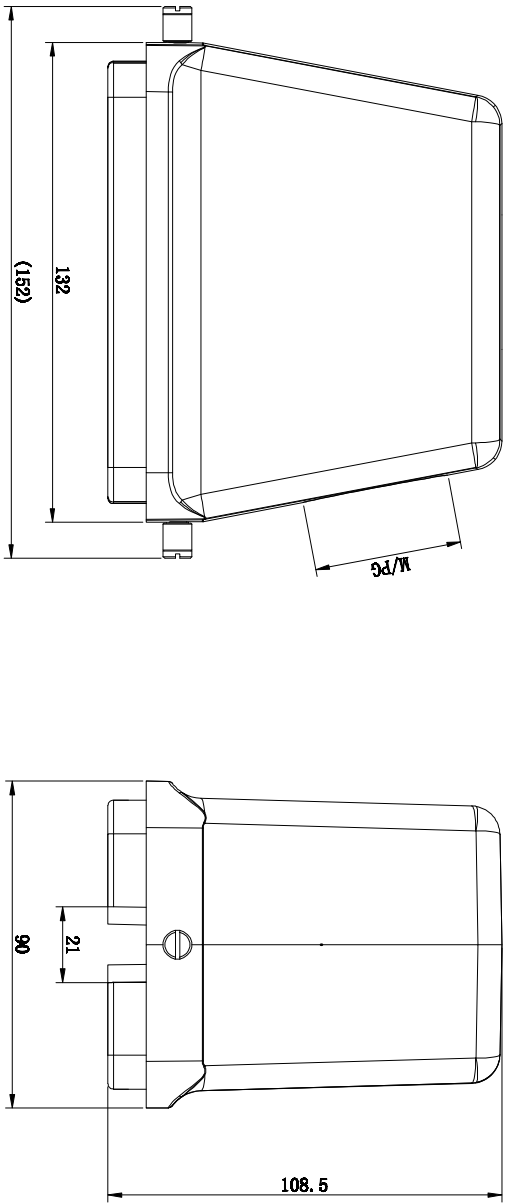

- Technical specification:**
- 1. Material: Aluminium die-cast
 - 2. Surface: powder-coated
 - 3. Colour: (grey)
 - 4. Temperature range: -40℃ - +125℃
 - 5. Degree of Protection: IP65
(acc. to IEC 60529 for coupled connector)
 - 6. Cable entry: side entry
 - 7. Thread size: M/Pg

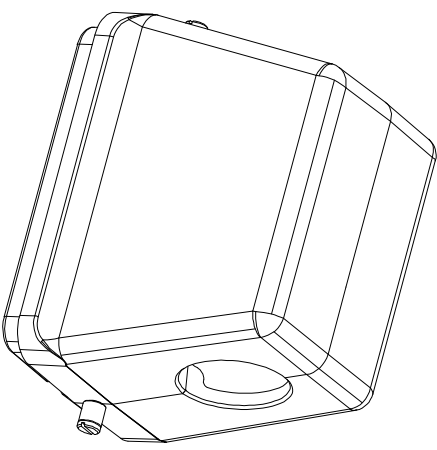

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE	
DWG.	SWL	DATE	2023.12.9	MM	SHEET/OF	1/1
CHK.	DATE			SCALE	1:1	A4
APP.	DATE			NAME	UL0-HC10-H48B-SE-2B-XX	
				DWGNO.		