



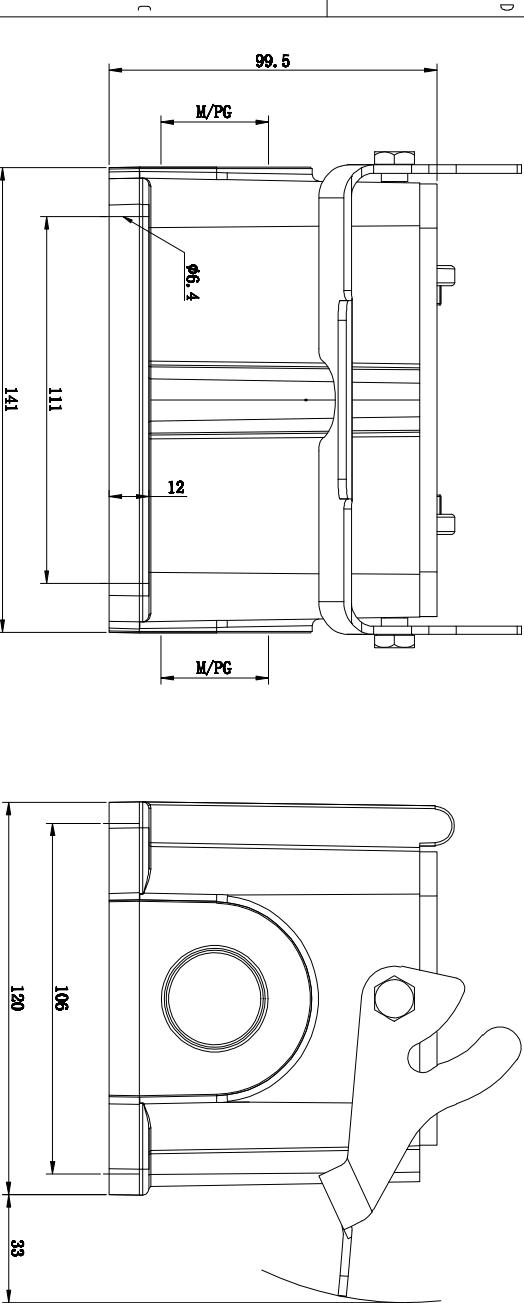

Type	Thread size (M/PG)
UL0-HC10-H48B-SF-1L-M32	M32
UL0-HC10-H48B-SF-1L-2M32	2M32
UL0-HC10-H48B-SF-1L-M40	M40
UL0-HC10-H48B-SF-1L-2M40	2M40
UL0-HC10-H48B-SF-1L-PG29	PG29
UL0-HC10-H48B-SF-1L-2PG29	2PG29
UL0-HC10-H48B-SF-1L-PG36	PG36
UL0-HC10-H48B-SF-1L-2PG36	2PG36

Technical specification:

- 1. Material: Aluminium die-cast
- 2. Surface: powder-coated
- 3. Colour: (grey)
- 4. Temperature range: -40℃ - +125℃
- 5. Degree of Protection: IP65
(acc. to IEC 60529 for coupled connector)
- 6. Locking element:
locking type: single locking latch
material: stainless steel
- 7. Cable entry: side entry
- 8. Thread size: M/PG
- 9. Hoods/Housings sealing: NBR

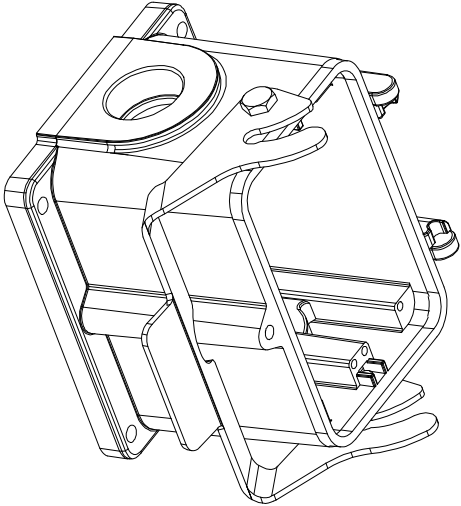

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	2023.12.9	UNITS	MM
CHK.	DATE			SCALE	1:1
APP.	DATE				A4
				NAME	UL0-HC10-H48B-SF-1L-XX
				DWGNO.	