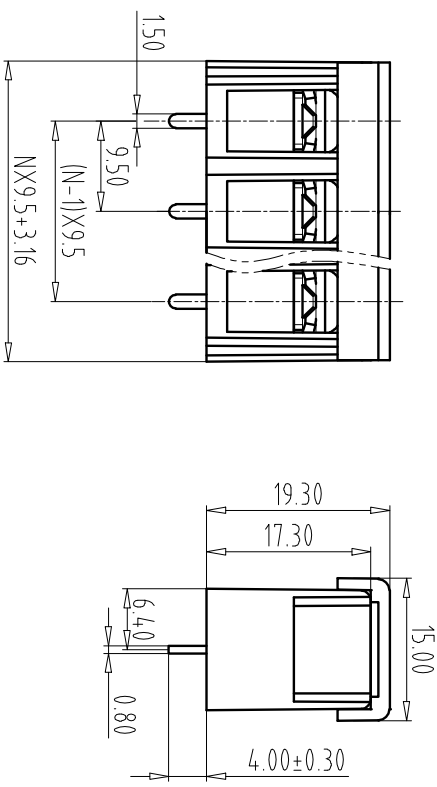
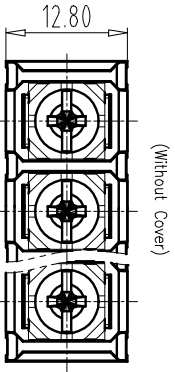


NOTES:

UL Standard

1.

Use group	B	C	D
Rated Current	20A	20A	10A
Rated Voltage	300V	150V	300V

2. Wire range: 22~14AWG

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	II
Rate impulse Voltage(kV)	6.0kV
Rate Voltage(V)	600V
Rate Current(A)	32A

NOTES2:

- 1.Housing: PA66(UL94V-0)
- 2.Screw: Steel(M3/Ni Plated)
- 3.Pin header: Copper alloy(M3/Sn Plated)
- 4.Cover: PC(UL94V-2)

NOTES3:

- 1.Pitch: 9.5mm Poles: 02-22P
- 2.Stripping length: 9mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

How to order

UL0-IB42 - 48S/B - XXP - Y 100A

Certificate Factory poles
Series NO. Code

Customer requirements

color:

- 1:Grey 6:Red
- 2:Blue 7:transparent
- 3:Black 8:Yellow
- 4:Green 9:White
- 5:Orange

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	LZW	DATE	21.05.31	UNITS	MM
CHK	DATE	SCALE	1:1	A4	1/1
APP	DATE	NAME	UL0-IB42-48S/B-XXP-Y100A		
			UL0TB42Y100A		



NINGBO ULO ELECTRONICS CO.,LTD.