

FILE: 2021-D01VULO

REV





ECN NO.

CONTENT

CHK

DATE

10.00XN+2.38

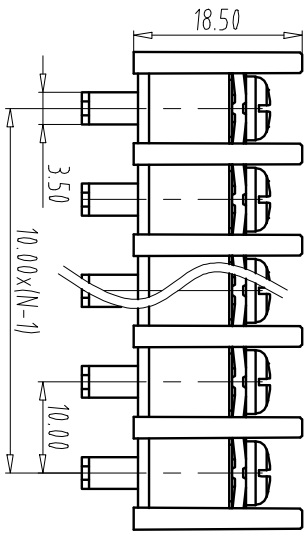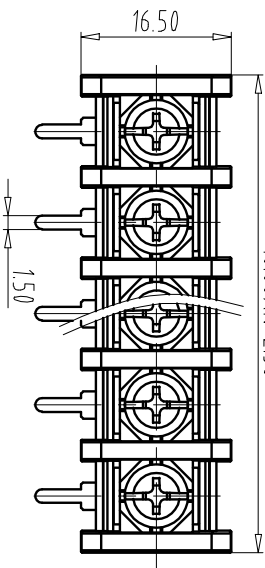

NOTES1:

UL Standard

1.

|               |      |   |      |
|---------------|------|---|------|
| Use group     | B    | C | D    |
| Rated Current | 20A  | — | 10A  |
| Rated Voltage | 300V | — | 300V |

2. Wire range: 12~22AWG

IEC Standard

1.

|                          |       |
|--------------------------|-------|
| Pollution Degree         | 2     |
| Overvoltage Category     | II    |
| Rate Impulse Voltage(kV) | 6.0kV |
| Rate Voltage(V)          | 320V  |
| Rate Current(A)          | 32A   |

2. Wire range: 0.5~4.0mm<sup>2</sup>

NOTES2:

1.Housing: PA66(UL94V-0)

2.Screw: Steel(INI Plated)

3.Solder Pin: Brass(Tin Plated)

NOTES3:

1.Pitch: 10mm Poles: 02-24P

2.Operating temperature: -40℃~+105℃

3.RoHS Compliance

How to order

ULO-TB41 - 55R/B - XXP - Y 1 0 0 A

Certificate Factory poles  
Series NO. Code

Customer requirements

color:

- 1:Grey 6:Red
- 2:Blue 7:transparent
- 3:Black 8:Yellow
- 4:Green 9:White
- 5:Orange

Total Pitch Tolerances

Nominal dimension range

—

≡

—

//

in mm

in mm

over

over

over

over

0

to

to

to

to

to

to

to

to

to

to

to

to

to

to

±0.18

±0.20

±0.25

±0.3

±0.35

±0.4

±0.44

±0.55

±0.70

±0.75

±0.80

±0.80

±0.90

0.2

0.3

0

30

53

70

90

115

150

200

250

300

320

360

400

450

500

0

30

53

70

90

115

150

200

250

300

320

360

400

450

500

0

30

53

70

90

115

150

200

250

300

320

360

400

450

500

0

30

53

70

90

115

150

200

250

300

320

360

400

450

500

0

30

53

70

90

115

150

200

250

300

320

360

400

450

500

0

30

53

70

90

115

150

200

250

300

320

360

400

450

500

0

30

53

70

90

115

150

200

250

300

320

360

400

450

500

0

30

53

70

90

115

150

200

250

300

320

360

400

450

500

0

30

53

70

90

115

150

200

250

300

320

360

400

450

500

0

30

53

70

90

115

150

200

250

300

320

360

400

450

500

0

30

53

70

90

115

150

200

250

300

320

360

400

450

500

0

30

53

70

90

115

150

200

250

300

320

360

400

450

500

0

30

53

70

90

115

150

200

250

300

320

360

400

450

500

0

30

53

70

90

115

150

200

250

300

320

360

400

450

500

0

30

53

70

90

115

150

200

250

300

320

360

400

450

500

0

30

53

70

90

115

150

200

250

300

320

360

400

450

500

0

30

53

70

90

115

150

200

250

300

320

360

400

450

500

0

30

53