

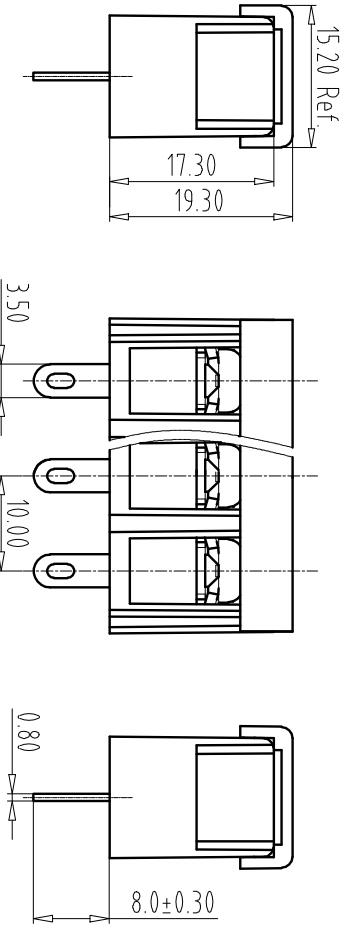


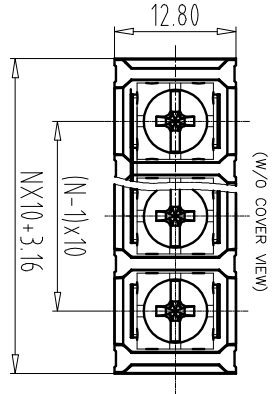

NOTES1:
UL Standard

1. Use group	B	C	D
Rated Current	20A	20A	10A
Rated Voltage	300V	150V	300V

2. Wire range: 22~14AWG
IEC Standard

1. Pollution Degree	2
Overvoltage Category	II
Rate impulse Voltage(kV)	6.0kV
Rate Voltage(V)	600V
Rate Current(A)	32A

NOTES2:

- 1.Housing: PA66(UL94V-0)
- 2.Screw: Steel(M3/Ni Plated)
- 3.Pin header: Copper alloy(M3/Sn Plated)
- 4.Cover: PC(UL94V-2)

NOTES3:

- 1.Pitch: 10.0mm Poles: 02-24P
- 2.Stripping length: 10mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

How to order

UL0-TB41 - 58H/B - XXP - Y 100 A

Certificate Factory poles
Series NO. Code Customer requirements

- color:
- 1:Grey 6:Red
 - 2:Blue 7:transparent
 - 3:Black 8:Yellow
 - 4:Green 9:White
 - 5:Orange

Total Pitch Tolerances										Nominal dimension range										±	≠	—	//
in mm										in mm													
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	over	over	over	over
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all	to	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	100	to	100	150	150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3
6										5										4			

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	LZW	DATE	21.05.31	UNITS	MM
CHK	DATE	SCALE	1:1	SHEET/OF	A4 1/1
APP	DATE	NAME	UL0-TB41-58H/B-XXP-Y100A		
NINGBO UL0 ELECTRONICS CO.,LTD.				DWGNO	UL0TB41Y100A