


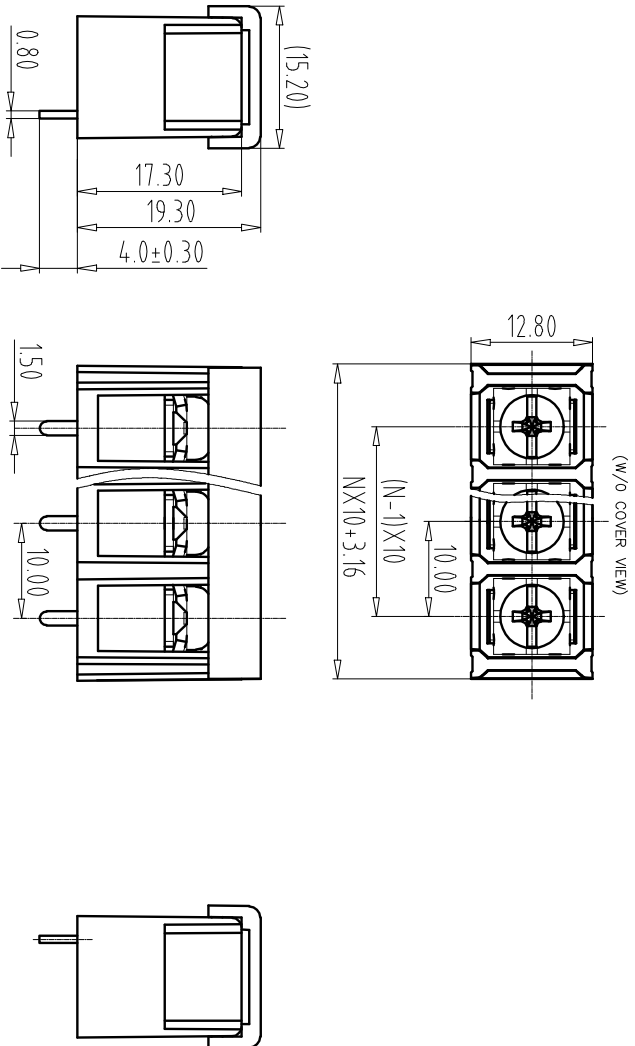

NOTES1:

UL Standard

1.

Use group	B	C	D
Rated Current	20A	20A	10A
Rated Voltage	300V	150V	300V

2. Wire range: 22~14AWG

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	II
Rate impulse Voltage(kV)	6.0kV
Rate Voltage(V)	600V
Rate Current(A)	32A

NOTES2:

1.Housing: PA66(UL94V-0)

2.Screw: Steel(M3/Ni Plated)

3.Pin header: Copper alloy(M3/Sn Plated)

4.Cover: PC(UL94V-2)

NOTES3:

1.Pitch: 10.0mm Poles: 02-24P

2.Stripping length: 10mm

3.Operating temperature: -40℃~+105℃

4.RoHS Compliance

How to order

UL0-TB41 - 58S/B - XXP - Y 100 A

Certificate Series NO. Factory poles Code Customer requirements

color:

- 1:Grey 6:Red
- 2:Blue 7:transparent
- 3:Black 8:Yellow
- 4:Green 9:White
- 5:Orange

Total Pitch Tolerances										Nominal dimension range										—	//
in mm										in mm											
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over		
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over		
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all	0	100
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	100	to	150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.5

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	LZW	DATE	21.05.31	UNITS	MM
CHK	DATE	SCALE	1:1	SHEET/OF	A4
APP	DATE	NAME	UL0-TB41-58S/B-XXP-Y100A		
NINGBO UL0 ELECTRONICS CO.,LTD.				DWGNO	UL0TB41Y100A