
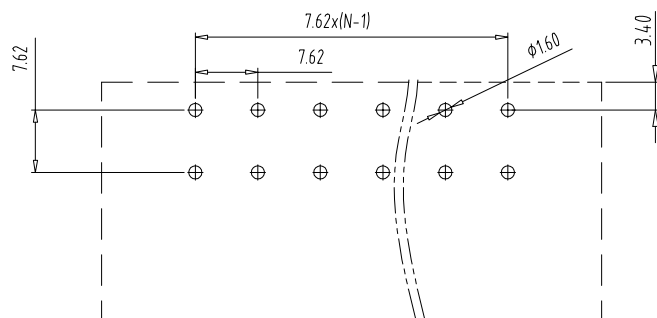
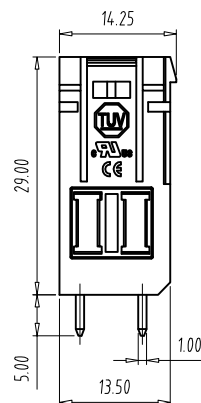
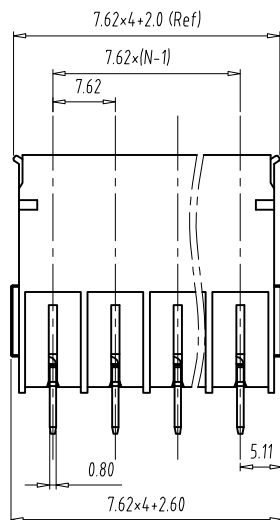





PCB LAYOUT

NOTES1:

UL Standard

1. Use group	B	C	D
Rated Current	41A	—	5A
Rated Voltage	300V	—	600V

2.Dielectric Voltage-Withstand: 1.6KV

IEC Standard

1. Pollution Degree	3	2	2
Overvoltage Category	III	III	I
Rate Impulse Voltage(KV)	6KV	6KV	6KV
Rate Voltage(V)	500V	800V	1000V
Rate Current(A)	41A	41A	41A

NOTES2:

1.Housing: PA66 (UL94V-0)

2.Pin header: Copper (Sn Plated)

NOTES3:

1.Pitch: 7.62mm ,Poles: 02-12P

2.Operating temperature: -40℃~+105℃

3.RoHS Compliance

4.Soldering temperature: 260℃/5S

How to order

ULO-TB39 - 5VH/7.62 - XXP - Y 0 0 0 A

Certificate	Factory	poles	Customer requirements
Series NO.	Code		color:
			1:Grey 5:Orange
			2:Blue 6:Red
			3:Black 7:transparent
			4:Green 8:Yellow
			9:White

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE
DWG.	HSH	DATE	22.05.24	UNITS	MM
CHK.		DATE		SCALE	1: 1
APP.		DATE			
			NAME	ULO-TB39-5VH/7.62-XXP-Y000A	
			DWGNO.		

NINGBO ULO ELECTRONICS CO.,LTD.
宁波欧路电子有限公司