





FILE: 2021-D01VUL0

REV EC.N NO.

CONTENT

CHK

DATE

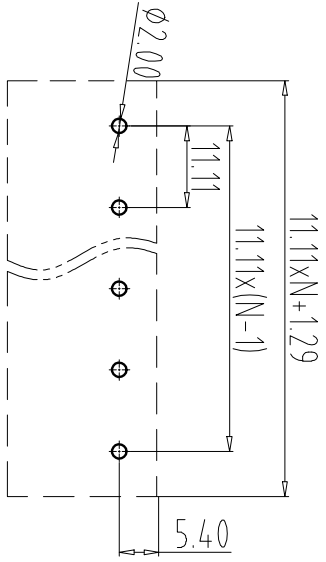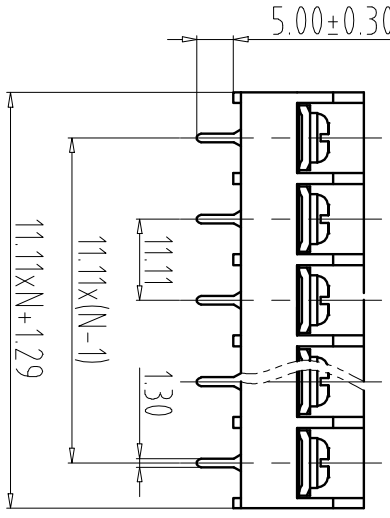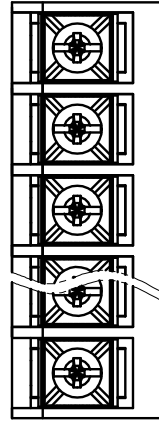

PCB LAYOUT

NOTES:

UL Standard

1.

Use group	B	C	D
Rated Current	30A	30A	10A
Rated Voltage	300V	150V	300V

2. Wire range: 22~10AWG

IEC Standard

1.

Pollution Degree	3	2	2
Overvoltage Category	II	II	I
Rate Impulse Voltage(kV)	6.0kV	6.0kV	6.0kV
Rate Voltage(V)	600V	600V	1000V
Rate Current(A)	41A	41A	41A

2. Wire range: 6.0mm²

NOTES2:

- 1.Housing: PA66(UL94V-0)
- 2.Screw: Steel(M4/Ni Plated)
- 3.Pin header: Copper alloy(M4/Sn Plated)

NOTES3:

- 1.Pitch: 11.11mm Poles: 02-24P
- 2.Stripping length: 10mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

How to order

ULO-IB39 - 66S/B - XXP - Y 1 0 0 A

Certificate Factory poles
Series NO. Code

Customer requirements

color:

- 1:Grey 6:Red
- 2:Blue 7:transparent
- 3:Black 8:Yellow
- 4:Green 9:White
- 5:Orange

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	LZW	DATE	21.05.31	UNITS	MM
CHK	DATE	SCALE	1:1	A4	1/1
APP	DATE	NAME	ULO-IB39-66S/B-XXP-Y100A	UL0TB39Y100A	



NINGBO ULO ELECTRONICS CO.,LTD.

UL0TB39Y100A