
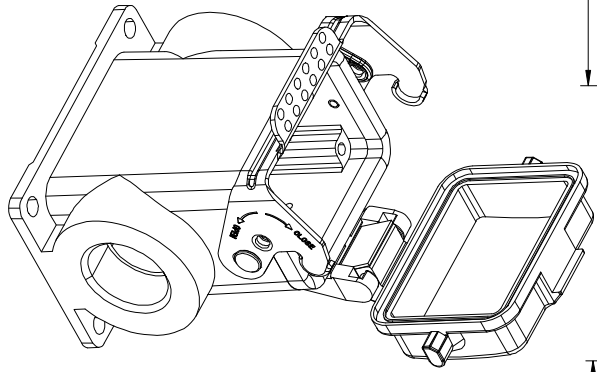


Type	Thread size (M/Pg)
ULO-HC05-H6B-SFH-1L-CV-M25	M25
ULO-HC06-H6B-SFH-1L-CV-2xM25	2xM25
ULO-HC06-H6B-SFH-1L-CV-M32	M32
ULO-HC06-H6B-SFH-1L-CV-2xM32	2xM32
ULO-HC06-H6B-SFH-1L-CV-P321	2P321
ULO-HC06-H6B-SFH-1L-CV-2P321	2P321
ULO-HC06-H6B-SFH-1L-CV-P329	2P329
ULO-HC06-H6B-SFH-1L-CV-2P329	2P329

Technical specification:

1. Material: Aluminium die-cast
2. Materia, coverl: PC
3. Surface:powder-coated
4. Colour: (grey)
5. Temperature range: -40℃ - +125℃
6. Degree of Protection: IP65
(acc. to IEC 60529 for coupled connector)
7. Locking element:
locking type:single locking latch
material: metal galvanized/nickel plating
8. Cable entry: side entry
9. Thread size: M/Pg
10. Hoods/Housings sealing: NBR

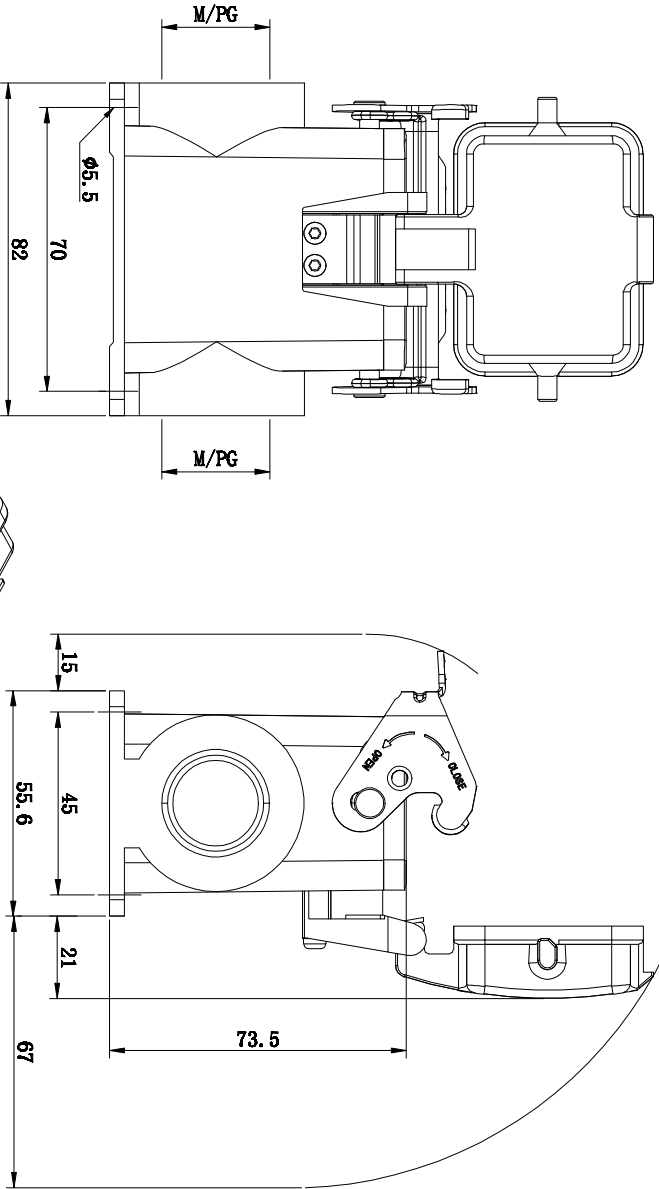

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	2023.12.19	MM	SHEET/OF 1/1
CHK.	DATE	DATE		SCALE	A4
APP.	DATE	DATE		NAME	ULO-HC05-H6B-SFH-CV-XX
NINGBO ULO ELECTRONICS CO.,LTD.				DWGNO.	



宁波欧路电子有限公司