
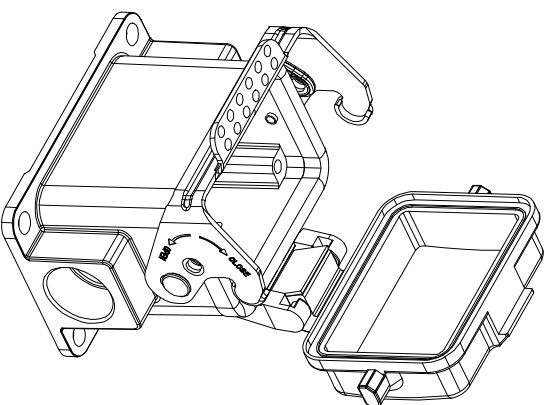


REV	E.C.N NO.	CONTENT	CHK	DATE
		Type	Thread size (M/Pg)	
		ULO-HC05-H6B-SF-1L-MCV-M20	M20	
		ULO-HC05-H6B-SF-1L-MCV-2xM20	2xM20	
		ULO-HC05-H6B-SF-1L-MCV-M25	M25	
		ULO-HC05-H6B-SF-1L-MCV-2xM25	2xM25	
		ULO-HC05-H6B-SF-1L-MCV-PG16	PG16	
		ULO-HC05-H6B-SF-1L-MCV-2PG16	2PG16	

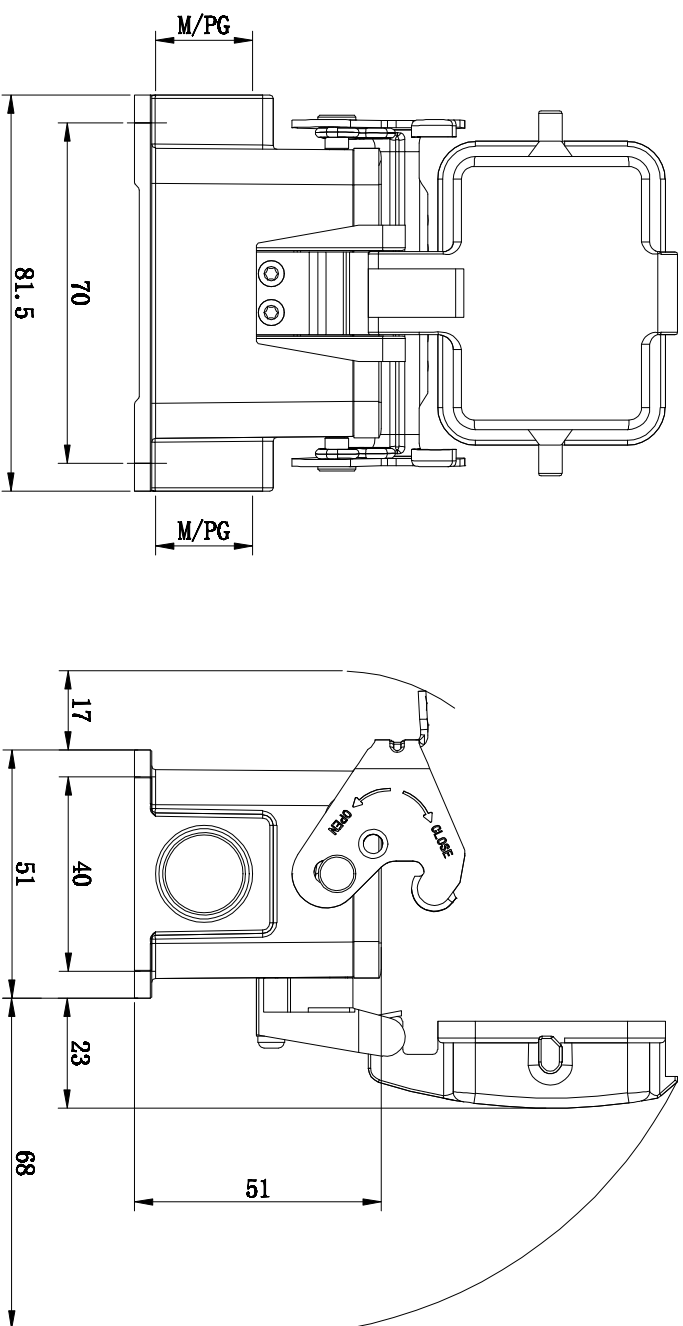

Technical specification:

1. Material: Aluminium die-cast
2. Materia, coverl: Aluminium die-cast
3. Surface: powder-coated
4. Colour: (grey)
5. Temperature range: -40℃ - +125℃
6. Degree of Protection: IP65
(acc. to IEC 60529 for coupled connector)
7. Locking element:
locking type:single locking latch
material: metal galvanized/nickel plating
8. Cable entry: side entry
9. Hoods/Housings sealing: NBR

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	2023.12.19	UNITS	MM
CHK.	DATE	SCALE	1:1	A4	1/1
APP.	DATE	NAME	ULO-HC05-H6B-SF-MCV-XX		
NINGBO ULO ELECTRONICS CO.,LTD.			DWGNO.		



宁波欧路电子有限公司