
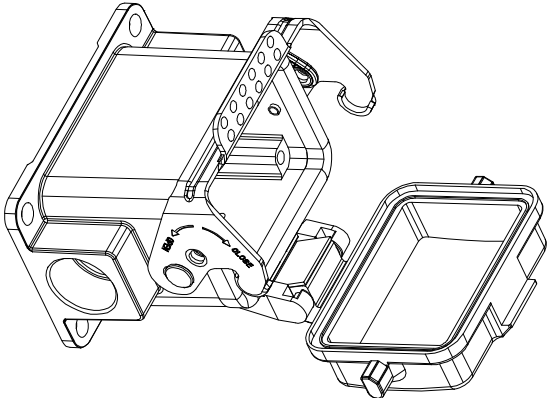


REV	E.C.N NO.	CONTENT	CHK	DATE
Type			Thread size (M/Pg)	
		ULO-HC05-H6B-SF-IL-CY-M20	M20	
		ULO-HC05-H6B-SF-IL-CY-2M20	2M20	
		ULO-HC05-H6B-SF-IL-CY-M25	M25	
		ULO-HC05-H6B-SF-IL-CY-2M25	2M25	
		ULO-HC05-H6B-SF-IL-CY-PG16	PG16	
		ULO-HC05-H6B-SF-IL-CY-2PG16	2PG16	

Technical specification:

1. Material: Aluminium die-cast
2. Materia, coverl: PC
3. Surface:powder-coated
4. Colour: (grey)
5. Temperature range:-40℃ - +125℃
6. Degree of Protection: IP65
(acc. to IEC 60529 for coupled connector)
7. Locking element:
locking type:single locking latch
material: metal galvanized/nickel
plating
8. Cable entry: side entry
9. Hoods/Housings sealing: NBR

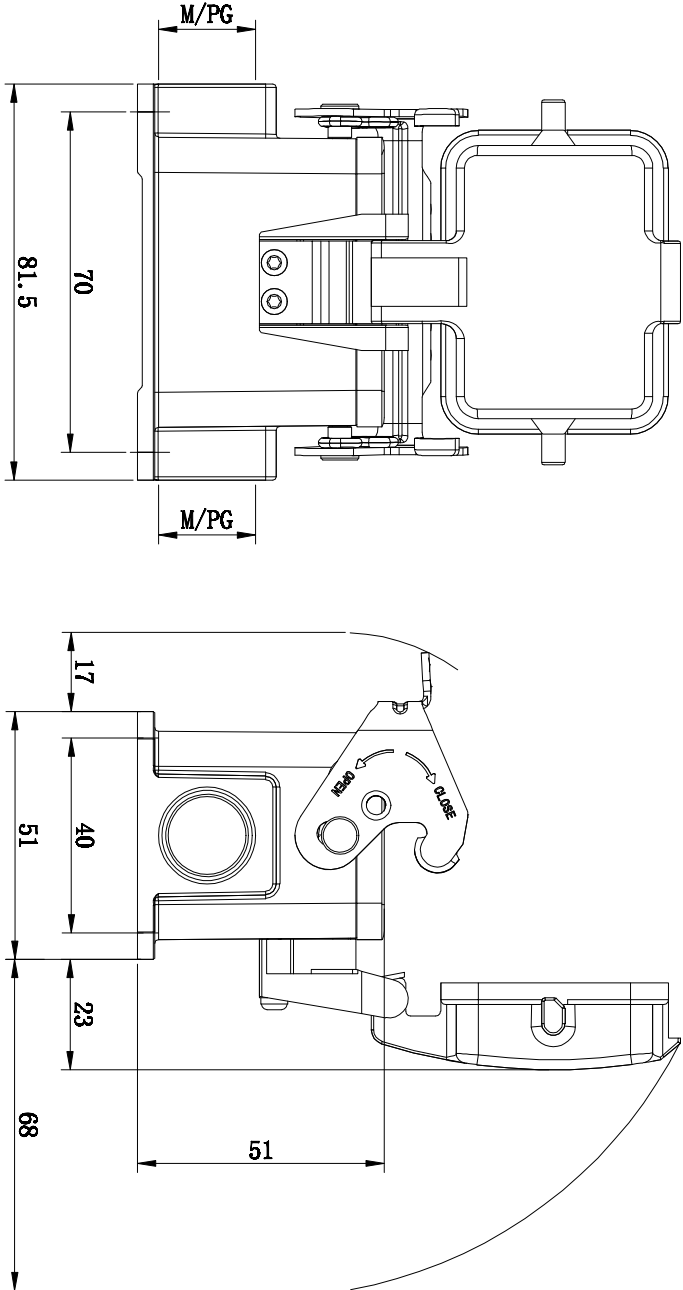

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	2023.12.19	MM	SHEET/OF 1/1
CHK.	DATE			SCALE	1:1
APP.	DATE				A4
				NAME	ULO-HC05-H6B-SF-CY-XX
				DWGNO.	