


REV	E.C.N NO.	CONTENT	CHK	DATE
		Type	Thread size (M/Pg)	
		ULO-HC05-H6B-SF-1L-M20	M20	
		ULO-HC06-H6B-SF-1L-2M20	2M20	
		ULO-HC06-H6B-SF-1L-M25	M25	
		ULO-HC06-H6B-SF-1L-2M25	2M25	
		ULO-HC06-H6B-SF-1L-PG16	PG16	
		ULO-HC06-H6B-SF-1L-2PG16	2PG16	

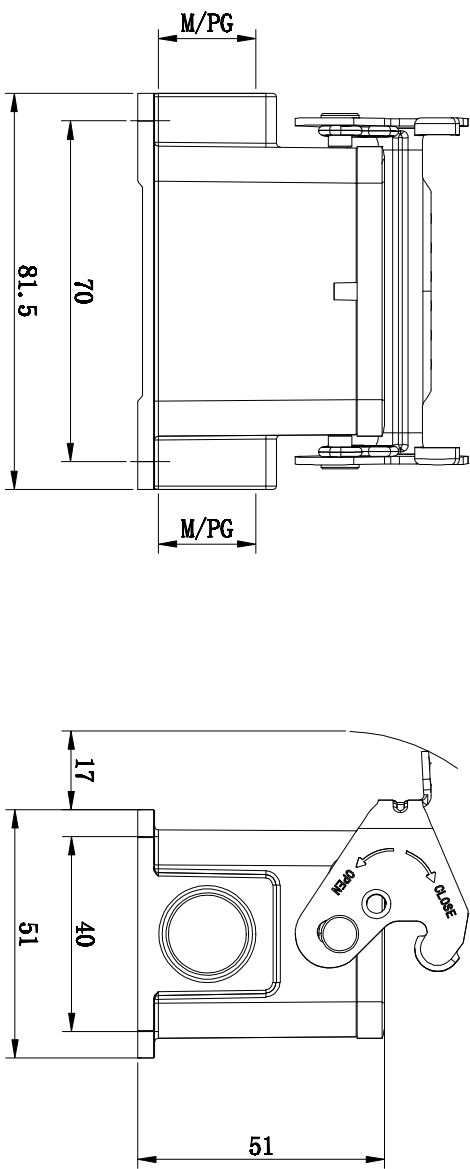


Technical specification:

- 1. Material: Aluminium die-cast
- 2. Surface: powder-coated
- 3. Colour: (grey)
- 4. Temperature range: -40℃ - +125℃
- 5. Degree of Protection: IP65
(acc. to IEC 60529 for coupled connector)

Locking element:

locking type: single locking latch
material: metal galvanized/nickel

- 6. Locking element:
locking type: single locking latch
material: metal galvanized/nickel
- 7. Cable entry: side entry
- 8. Hoods/Housings sealing: NBR

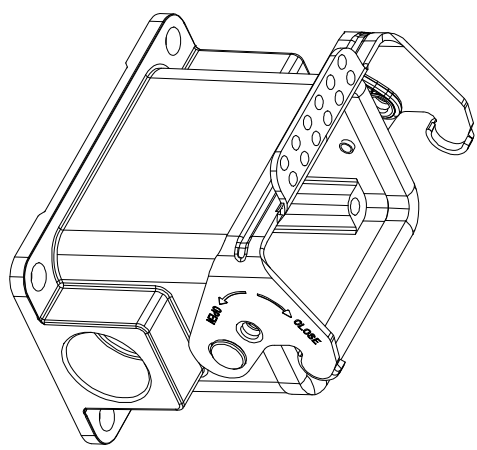

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE	
DWG.	SWL	DATE	2023.12.19	UNITS	MM	SHEET/OF 1/1
CHK.		DATE		SCALE	1:1	A4
APP.		DATE		NAME	UL0-HC05-H6B-SF-1L-XX	
				NINGBO UL0 ELECTRONICS CO.,LTD.		
				宁波欧路电子有限公司		
				DWGNO.		