


FILE: 2021-D01\ULO

REV	E.C.N NO.	CONTENT	CHK	DATE

Without Cover

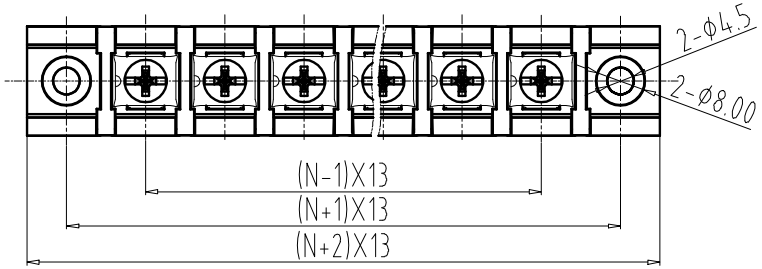

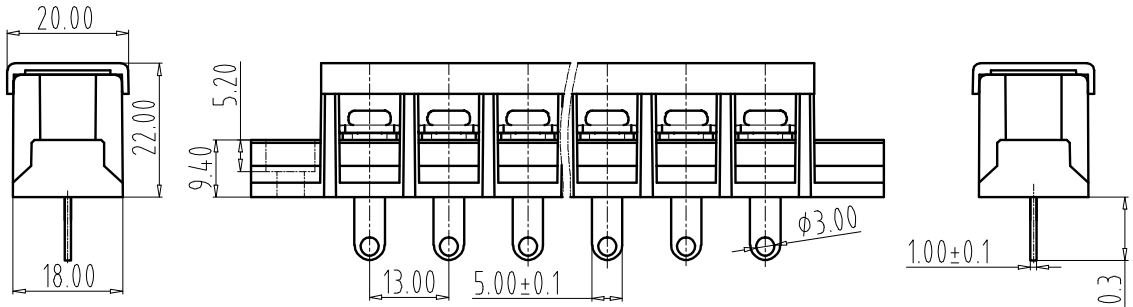

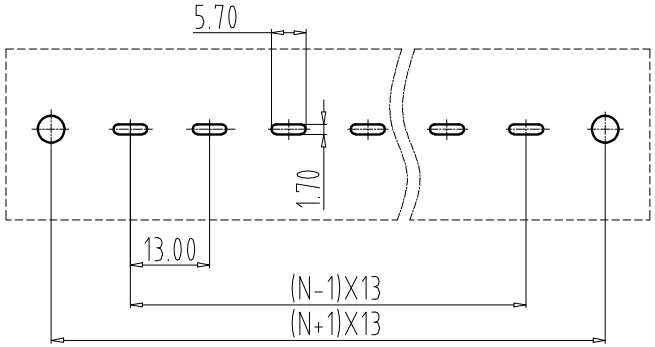

PCB LAYOUT

NOTES1:

UL Standard

1.

Use group	B	C	D
Rated Current	40A	40A	5A
Rated Voltage	600V	600V	600V

2.Wire range: 18～10AWG

IEC Standard

1.

Pollution Degree	3	2	2
Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
Rate Impulse Voltage(KV)	8.0KV	8.0KV	8.0KV
Rate Voltage(V)	600V	600V	600V
Rate Current(A)	41A	41A	41A

NOTES2:

1.Housing: PA66(UL94V-0)
2.Screw: Steel(Ni Plated)
3.Pin header: Copper alloy(Sn Plated)
4.Cover: PC(UL94V-2)

NOTES3:

1.Pitch: 13.0mm Poles: 02-24P
2.Stripping length: 9-10mm
3.Operating temperature: -40℃～+105℃
4.RoHS Compliance

How to order

ULO-TB37 - 78H/A - XXP - Y 100A

- ULO-TB37: Certificate Series NO.
- 78H/A: Factory Code
- XXP: poles
- Y: Customer requirements
- 100A: color:
 - 1:Grey
 - 2:Blue
 - 3:Black
 - 4:Green
 - 5:Orange
 - 6:Red
 - 7:transparent
 - 8:Yellow
 - 9:White

Total Pitch Tolerances in mm										Nominal dimension range in mm										⊥		÷	—		//
over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 320		over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 320		over 0 to 10	over 10	all	over 0 to 100	over 100 to 150	over 150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75		±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90		0.2	0.3	0.3	0.2	0.3	0.5

ITEM	NAME OF PART		NO. OF PART	Q"TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.05.31	UNITS	MM	SHEET/OF 1/1
CHK.		DATE		SCALE	1 : 1	A4
APP.		DATE		NAME	ULO-TB37-78H/A-XXP-Y100A	
NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司				DWGNO.	ULOTB37Y100A	