

		2		1	
REV	E.C.N NO.	CONTENT	CHK	DATE	

NOTES:

UL Standard

-

Use group	B	C	D
Rated Current	15A	—	—
Rated Voltage	300V	—	—

2. Wire range: 24 ~ 14AWG

IEC Standard






-

Pollution Degree	3
Overvoltage Category	III
Rate Impulse Voltage(KV)	6KV
Rate Voltage(V)	400V
Rate Current(A)	12A

- 2.wire range: 0.2-2.5mm²

NOTES:

- 1. Pitch: 7.5mm Poles: 02-24P
- 2. Stripping length: 8-9mm
- 3. Operating temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
- 4. RoHS Compliance

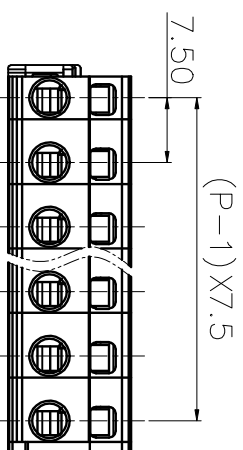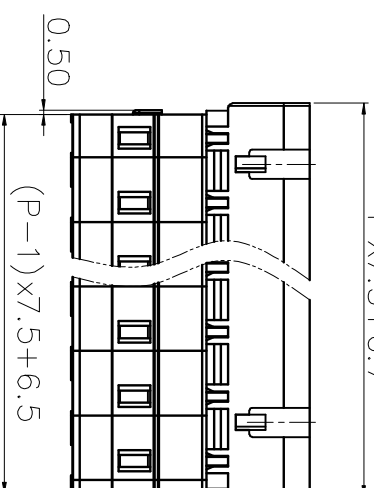

Total Pitch Tolerances

Nominal, dimension range[illegible]NINGBO UL0 ELECTRONICS CO.,LTD.
宁波欧路电子有限公司

DATE	SEP 10 1966
DWGNO.	X