

		2		1	
REV	E.C.N NO.	CONTENT	CHK	DATE	

NOTES:

UL Standard

Use group	B	C	D
Rated Current	15A	–	–
Rated Voltage	300V	–	–

2. Wire range: 24 ~ 14AWG

IEC Standard




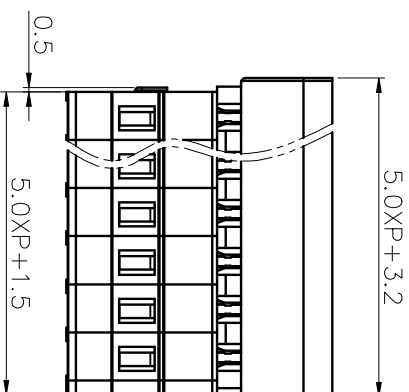
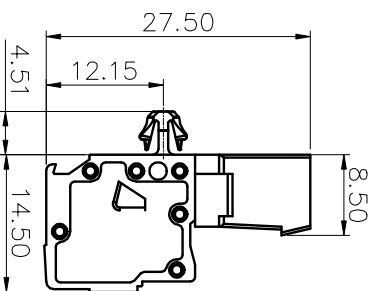
1

Pollution Degree	3
Overvoltage Category	III
Rate Impulse Voltage(KV)	4KV
Rate Voltage(V)	250V
Rate Current(A)	12A

2.wire range: 0.2-2.5mm²

NOTES:

1. Pitch: 5.0mm Poles: 02-24P
2. Stripping length: 8-9mm
3. Operating temperature: -40°C ~ +105°C
4. RoHS Compliance

[illegible]

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	/	/	UNITS	MM	SHEET/OF 1/1
CHK.	DATE		SCALE	1 : 1	A4
APP.	DATE				
NINGBO UL0 ELECTRONICS CO.,LTD.			NAME		
宁波欧路电子有限公司			UL0-TB440-8KRC-5.0-XXP		
			DWGNO. X		