

		2		1	
REV	E.C.N NO.	CONTENT	CHK	DATE	

NOTES:

UL Standard

→

Use group	B	C	D
Rated Current	15A	—	—
Rated Voltage	300V	—	—

2. Wire range: 24 ~ 14AWG

IEC Standard

→

Pollution Degree	3
Overvoltage Category	III
Rate Impulse Voltage(KV)	4KV
Rate Voltage(V)	250V
Rate Current(A)	12A

2.wire range: 0.2-2.5mm²

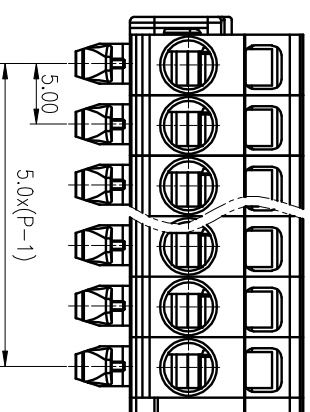

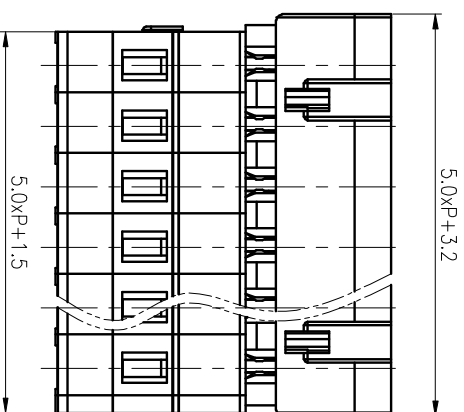
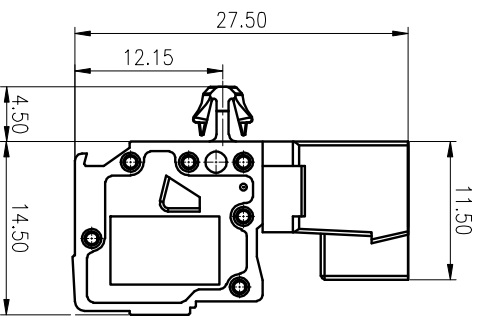

NOTES:

1.Pitch: 5.0mm Poles: 02-24P

2.Stripping length:8-9mm

3. Operating temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

4. RoHS Compliance

[illegible]

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL		NOTE	
DWG.	/	DATE	/	UNITS	MM	SHEET/OF	1/1
CHK.		DATE		SCALE	1 : 1	A4	
APP.		DATE		NAME	UL0-TB440-8KRD-5.0-XXP		
 NINGBO UL0 ELECTRONICS CO.,LTD. 宁波欧路电子有限公司				DWGNO.	X		