

REV	E.C.N NO.	CONTENT	CHK	DATE

NOTES1:

UL Standard

1.

Use group	B	C	D
Rated Current	15A	-	-
Rated Voltage	300V	-	-

2.Wire range: 24~14AWG

IEC Standard

1.

Pollution Degree	3
Overvoltage Category	III
Rate Impulse Voltage(KV)	6KV
Rate Voltage(V)	400V
Rate Current(A)	12A

2.wire range: 0.2-2.5mm²






NOTES2:

1.Pitch: 7.5mm Poles: 02-24P

2.Stripping length:8-9mm

3.Operating temperature: -40℃~+105℃

4.RoHS Compliance

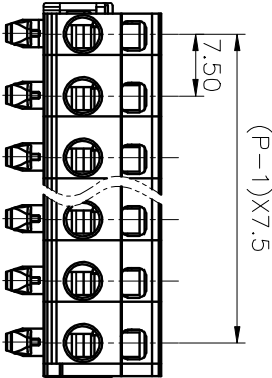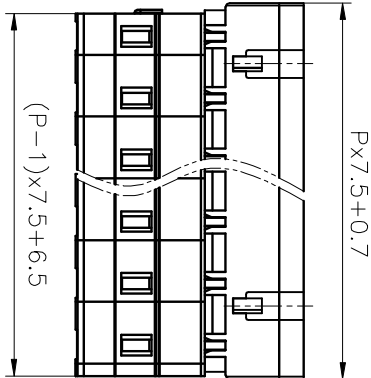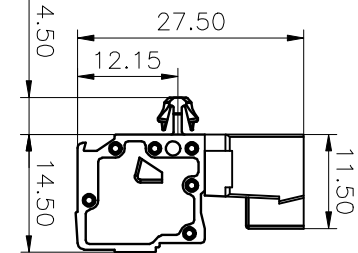

Total Pitch Tolerances												Nominal dimension range												—	≡	—	//
in mm												in mm															

over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	0	100	over	0	100	over	0	100
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all	to	to	150	to	to	150	to	
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10		100	150						
+0.18	+0.20	+0.25	+0.3	+0.35	+0.44	+0.55	+0.70	+0.75	+0.20	+0.25	+0.30	+0.35	+0.44	+0.55	+0.70	+0.80	+0.90	0.2	0.3	0.3	0.2	0.3	0.5				

ITEM	NAME OF PART		NO. OF PART	Q'TY	MATERIAL		NOTE	
DWG.	/	DATE	/	UNITS	MM	SHEET/OF	1/1	
CHK.		DATE		SCALE	1:1	A4		
APP.		DATE		NAME	UL0-TB460-8KRD-7.5-XXP			
 NINGBO UL0 ELECTRONICS CO.,LTD. 宁波欧路电子有限公司				DWGNO.	X			



宁波欧鹏电子有限公司