

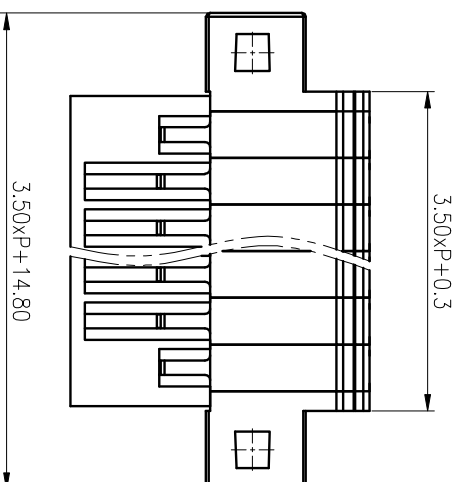
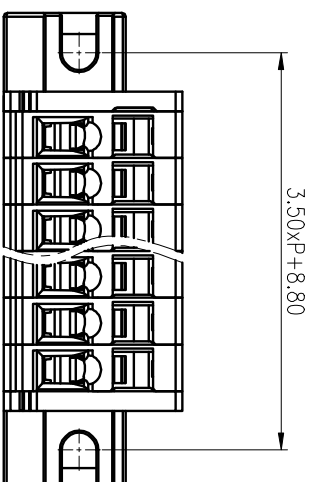


		2		1	
REV	E.C.N NO.	CONTENT	CHK	DATE	

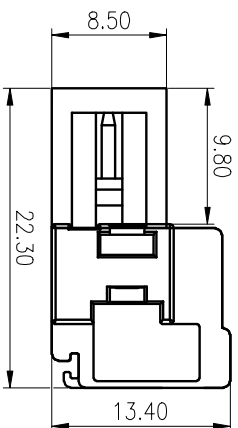

NOTES:

UL Standard

Use group	B	C	D
Rated Current	10A	—	—
Rated Voltage	300V	—	—

2. Wire range: 24~16AWG

IEC Standard

1

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(kV)	2.5k
Rate Voltage(V)	250V
Rate Current(A)	10A

2.wire range: 0.2-1.5mm²

NOTES:

1.Pitch: 3.5mm Poles: 02-24P

2.Stripping length:7mm

3. Operating temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

4. RoHS Compliance

[illegible]

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	/	DATE	UNITS	MM	SHEET/OF 1/1
CHK.		DATE	SCALE	1 : 1	A4
APP.		DATE			
NAME UL0-TB420-8KMA-35-XXP					
DWGNO. X					