

FILE: 21.06.03

REV	E.C.N NO.	CONTENT	CHK	DATE

NOTES1:

UL Standard

1.	Use group	B	C	D
	Rated Current	15A	-	-
	Rated Voltage	300V	-	-

2.Wire range: 24~14AWG

IEC Standard

1.

Pollution Degree	3
Overvoltage Category	III
Rate Impulse Voltage(KV)	6KV
Rate Voltage(V)	400V
Rate Current(A)	12A

2.wire range: 0.2-2.5mm²


NOTES2:

1.Pitch: 7.5mm Poles: 02-24P

2.Stripping length:8-9mm

3.Operating temperature: -40℃~+105℃

4.RoHS Compliance

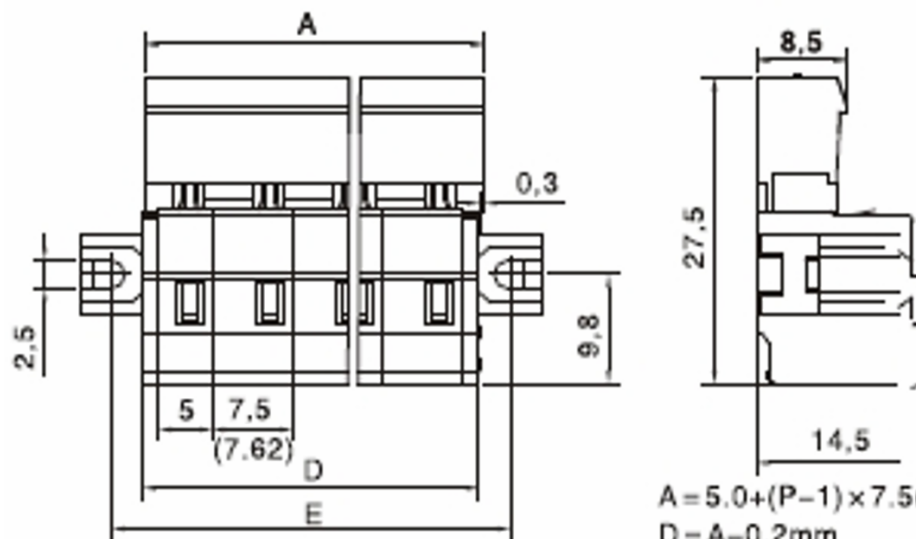

$$A = 5.0 + (P - 1) \times 7.5(7.62) + 3.2\text{mm}$$

$$D = A - 0.2\text{mm}$$

$$E = D + 5.8\text{mm}$$

A	Total Pitch Tolerances in mm									Nominal dimension range in mm									$\perp$		$\equiv$	$-$ //			
	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 320	over 0	over 10		over 0	over 100	over 150
	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 10			all	to 100	to 150	
	± 0.18	± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.55	± 0.70	± 0.75	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3	0.3	0.2	0.3	0.5	

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE	
DWG.	/	DATE	/	UNITS	MM	SHEET/OF 1/1
CHK.		DATE		SCALE	1:1	A4
APP.		DATE				
				NAME	ULO-TB460-8KRMA-7.5-XXP	
				DWGNO.		



NINGBO ULO ELECTRONICS CO.,LTD.

宁波欧路电子有限公司