

FILE: 21.06.03

REV	E.C.N NO.	CONTENT	CHK	DATE

NOTES1:

UL Standard

Use group	B	C	D
Rated Current	15A	-	-
Rated Voltage	300V	-	-

Wire range: 24~14AWG
standard

Pollution Degree	3
Overvoltage Category	III
Rate Impulse Voltage(KV)	6KV
Rate Voltage(V)	400V
Rate Current(A)	12A

Wire range: 0.2-2.5mm²


2:

Pitch: 7.62mm Poles: 02-24P

Stripping length: 8-9mm

Operating temperature: -40℃~+105℃

RoHS Compliance

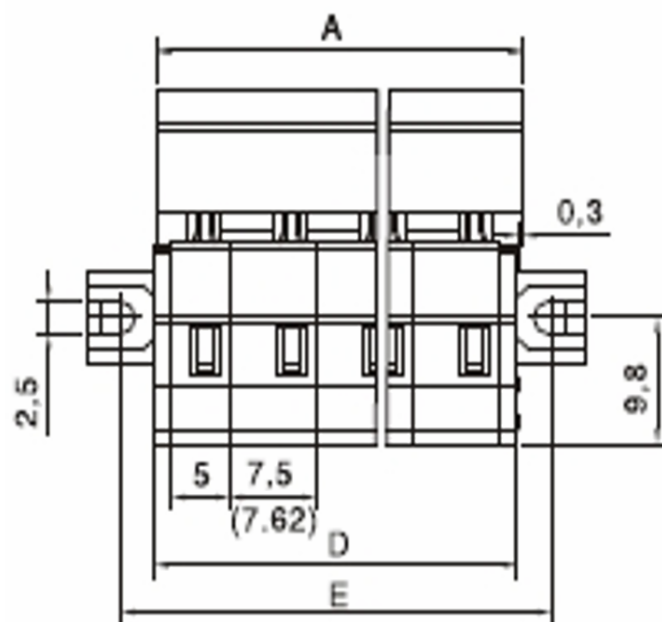

$$A = 5.0 + (P - 1) \times 7.5(7.62) + 3.2\text{mm}$$
$$D = A - 0.2\text{mm}$$
$$E = D + 5.8\text{mm}$$

Total Pitch Tolerances in mm										Nominal dimension range in mm										⊥	≡	—	//
over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 300	over 350	over 400	over 450	over 500	over 550	over 600	over 650	over 700	over 750	over 800	0	over	0	over
to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 300	to 350	to 400	to 450	to 500	to 550	to 600	to 650	to 700	to 750	to 800	to 850	10	all	to 100	to 150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	/	DATE	/	UNITS	MM
CHK.	/	DATE	/	SCALE	1:1
APP.	/	DATE	/	NAME	ULO-TB470-8KRMA-7.62-XXP
				DWGNO.	