

FILE: Z10603		6	5	4	3	2	1
REV	EC.N NO.	CONTENT				CHK	DATE

NOTES1:

UL Standard

Use group	B	C	D
Rated Current	4A	—	—
Rated Voltage	150V	—	—

2.Wire range: 24~20AWG

IEC Standard

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	2.5KV
Rate Voltage(V)	250V
Rate Current(A)	4A

2. wire range: 0.2-0.5mm²






NOTES2:

1.Pitch:2.5mm Poles: 02-12P

2.Stripping length:5-6mm

3.Operating temperature: -40℃~+105℃

4.RoHS Compliance

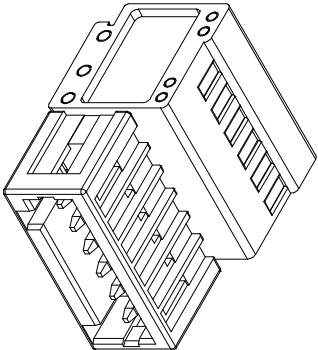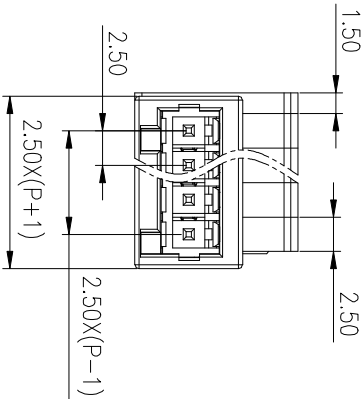

Total Pitch Tolerances in mm												Nominal dimension range in mm												—		—		//	
over												over												over		over		over	
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	0	over	0	over	0	over	0	over		
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to		
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	all	100	150								
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5						
6												5												4					

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	/	/			
CHK.	DATE		SCALE	1 : 1	1/1
APP.	DATE		NAME	UL0-TB410-8KR-2.5-XXP	
				DWGNO.	X



NINGBO UL0 ELECTRONICS CO.,LTD.

宁波欧路电子有限公司