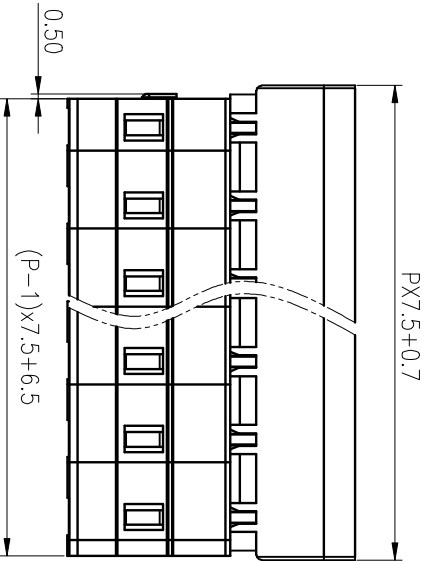
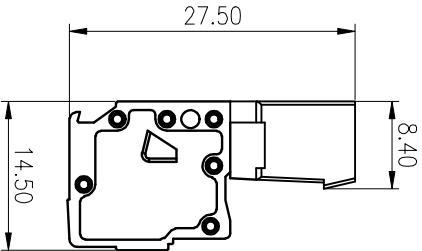
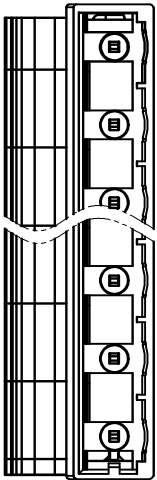


NOTES1:

UL Standard

1.

Use group	B	C	D
Rated Current	15A	—	—
Rated Voltage	300V	—	—

2.Wire range: 24~14AWG

IEC Standard

1.

Pollution Degree	3
Overvoltage Category	III
Rate Impulse Voltage(KV)	6KV
Rate Voltage(V)	400V
Rate Current(A)	12A

2.wire range: 0.2-2.5mm²


NOTES2:

1.Pitch:7.5mm Poles: 02-24P

2.Stripping length:8-9mm

3.Operating temperature: -40℃~+105℃

4.RoHS Compliance



Total Pitch Tolerances												Nominal dimension range										—		=		—		//	
in mm												in mm																	
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	0	over	0	over	0	100	over	0	100	over
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all	to	all	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	10	100	100	150	150	150	150	150	150	150	150
+0.18	+0.20	+0.25	+0.3	+0.35	+0.44	+0.55	+0.70	+0.75	+0.20	+0.25	+0.30	+0.35	+0.44	+0.55	+0.70	+0.80	+0.90	0.2	0.3	0.3	0.2	0.3	0.5	0.5	0.5	0.5	0.5	0.5	0.5

ITEM	NAME OF PART	NO. OF PART	Q-TY	MATERIAL	NOTE
DWG.	/	DATE	/	MM	SHEET/OF 1/1
CHK.	DATE	SCALE	1:1	A4	
APP.	DATE	NAME	UL0-TB460-8KR-7.5-XXP		
NINGBO UIO ELECTRONICS CO.,LTD.				DWGNO.	X