


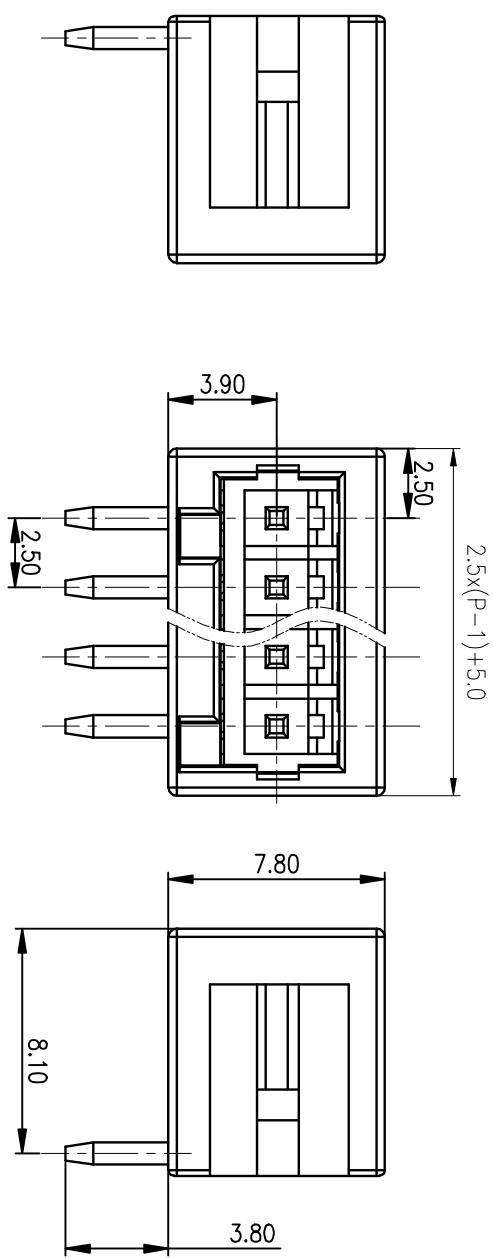

NOTES1:
UL Standard

Use group	B	C	D
Rated Current	4A	—	—
Rated Voltage	150V	—	—


2.Wire range: /
IEC Standard

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	2.5KV
Rate Voltage(V)	250V
Rate Current(A)	4A

2.wire range: /

NOTES2:

- 1.Pitch:2.50mm Poles: 02-12P
- 2.Stripping length:/
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance



Total Pitch Tolerances										Nominal dimension range													
in mm										in mm													
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over				
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over				
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all				
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	100				
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3				
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over				
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	150				
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	100				
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3				

	DWG.	/	DATE	/	UNITS	MM	SHEET/OF	1/1
	CHK.		DATE		SCALE	1 : 1	A4	
	APP.		DATE		NAME	ULO-TB410-8RC-2.5-XXP		
					DWGNO.	X		