

FILE: 2106.03

6

5

4

3

2

1



REV ECN NO

CONTENT

CHK

DATE

(P-1)x3.5+5.90

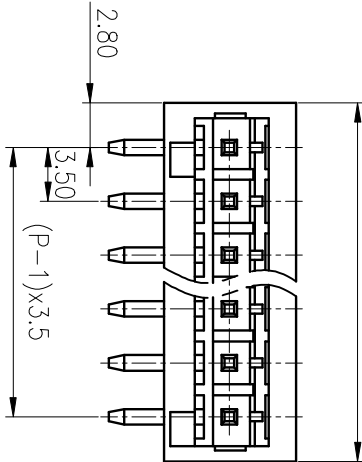

NOTES1:

UL Standard

Use group	B	C	D
Rated Current	10A	—	—
Rated Voltage	300V	—	—

2.Wire range: /

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(kV)	2.5kV
Rate Voltage(V)	250V
Rate Current(A)	10A

2.wire range:/


NOTES2:

1.Pitch:3.5mm Poles: 02-24P

2.Stripping length:/

3.Operating temperature: -40℃~+105℃

4.RoHS Compliance

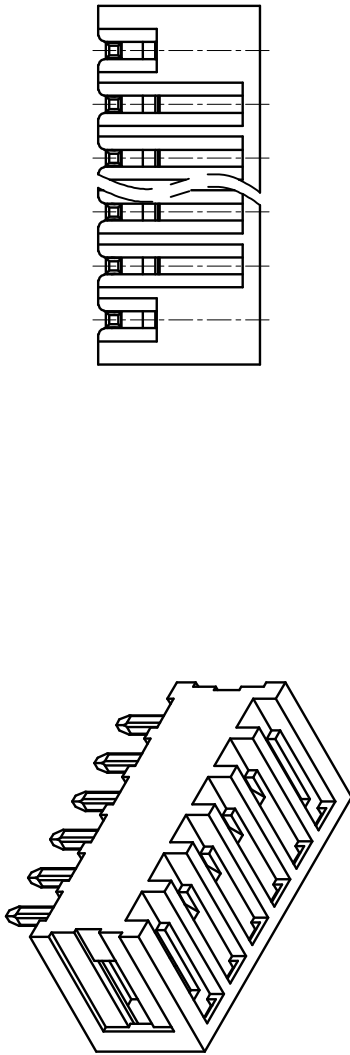

Total Pitch Tolerances												Nominal dimension range										T	≡	—	//
in mm												in mm													

over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	0	over	0	over	0	over
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10			all	100	100	150	
+0.18	+0.20	+0.25	+0.3	+0.35	+0.44	+0.55	+0.70	+0.75	+0.20	+0.25	+0.30	+0.35	+0.44	+0.55	+0.70	+0.80	+0.90	0.2	0.3	0.3	0.2	0.3	0.3	0.5	

ITEM	NAME OF PART	NO. OF PART	Q-TY	MATERIAL	NOTE
------	--------------	-------------	------	----------	------

DWG.	/	DATE	/	MM	SHEET/OF	1/1
------	---	------	---	----	----------	-----

CHK.	DATE	SCALE	1:1	A4	1/1	
------	------	-------	-----	----	-----	--

APP.	DATE	NAME	UL0-TB420-8RC-35-XXP
------	------	------	----------------------



NINGBO ULO ELECTRONICS CO.,LTD.

DWGNO

X