

2		1	
REV	E.C.N. NO.	CONTENT	CHK DATE

NOTES:

UL Standard

→

Use group	B	C	D
Rated Current	10A	—	—
Rated Voltage	300V	—	—

2. Wire range: /

IEC Standard

→

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	2.5KV
Rate Voltage(V)	250V
Rate Current(A)	10A

2.wire range:/





NOTES:

1.Pitch:3.81mm Poles: 02-24P

2.Stripping length:/

3. Operating temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

4. RoHS Compliance

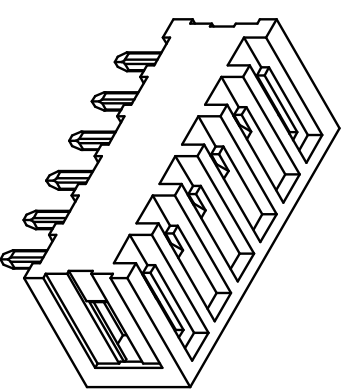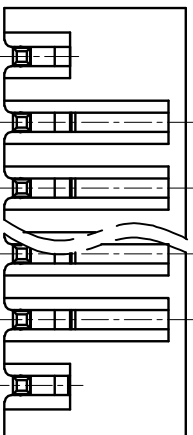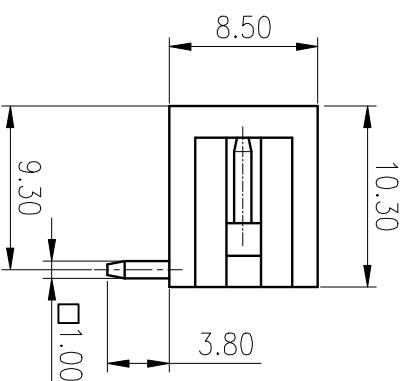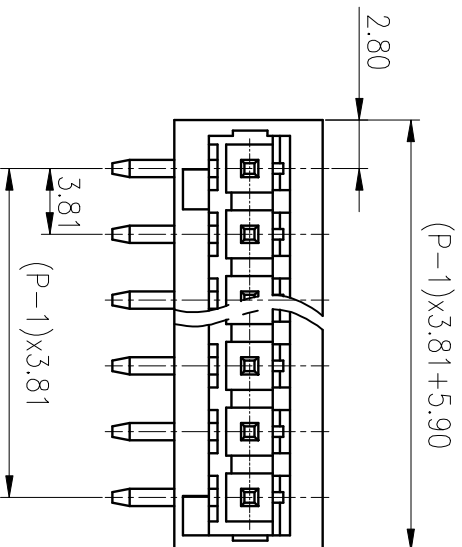

A									
Total Pitch Tolerances									
Nominal dimension range									
in mm									
in mm									
—									
=									
//									
over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0
to	to	to	to	to	to	to	to	to	all
30	53	70	90	115	150	200	250	320	10
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90
0.2	0.3	0.3	0.2	0.3	0.2	0.3	0.5		
3									
2									
1									
A									
ITEM									
NAME OF PART									
NO. OF PART									
DWG.									
/									
DATE									
CHK									
DATE									
APP.									
DATE									
NAME									
UL0-TB430-8RC-3.81-XXP									
DWGNO									
X									
NINGBO ULO ELECTRONICS CO.,LTD.									
宁波歌路电子有限公司									