

NOTES1:
UL Standard

Use group	B	C	D
Rated Current	10A	—	—
Rated Voltage	300V	—	—

2.Wire range: /
IEC Standard

Pollution Degree	3
Overvoltage Category	III
Rate Impulse Voltage(KV)	6KV
Rate Voltage(V)	400V
Rate Current(A)	12A




2.wire range:/

NOTES2:
1.Pitch:7.62mm Poles: 02-24P

2.Stripping length:/

3.Operating temperature: -4.0℃~+105℃

4.RoHS Compliance

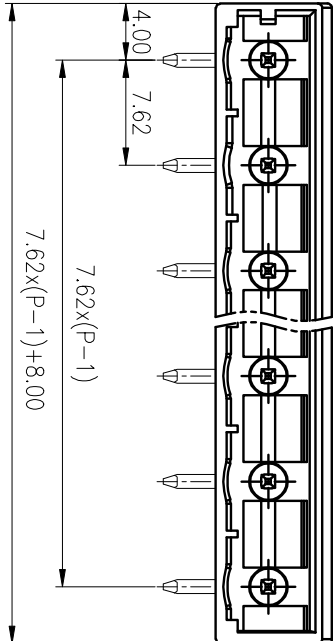

Total Pitch Tolerances												Nominal dimension range												—		//	
in mm												in mm															
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	0	over	0	100	over	0	100	
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all	to	to	to	to	to	150	
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10									
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.3	0.5			
6												5												4		3	

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	/	DATE	/		
CHK.		DATE		SCALE	1 : 1
APP.		DATE			
NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司					NAME ULO-TB470-8RC-7.62-XXP
DWGNO					X