


XHD型连接器承认书图面




6	5	4	3	2	1
名称	材料	数量	图号	附注	
基座 Housing	Nylon 66 UL94V-0	1	LHE\GC-48	White(白色)	
长针 Long needle	黄铜镀锡 Brass Tin	2			
短针 Short needle	黄铜镀锡 Brass Tin	N-2			
纸带 Paper tape					
胶带 Adhesive tape					


XHD-4A(1.3长针)编带装(空)

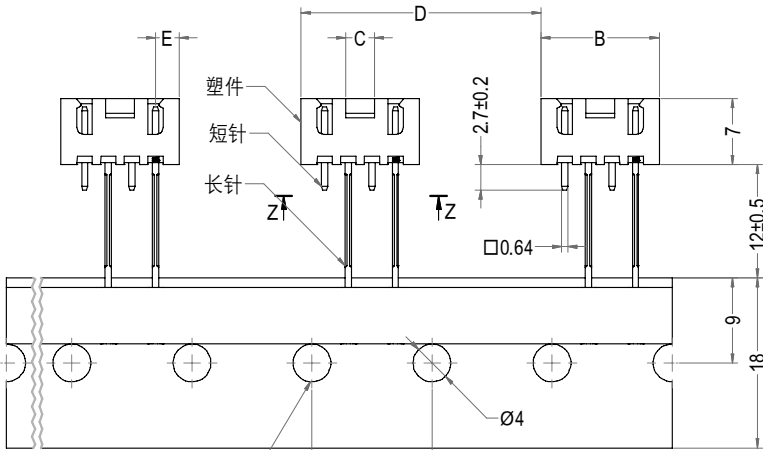


2/3pin间隔一个定位孔
5/6/7/8pin间隔两个定位孔
4pin两种间隔都有
4pin间隔1个定位孔为"并"
4pin间隔2个定位孔为"空"
间隔15默认"并",不生产"空"
(详见单独图纸)



Z-Z

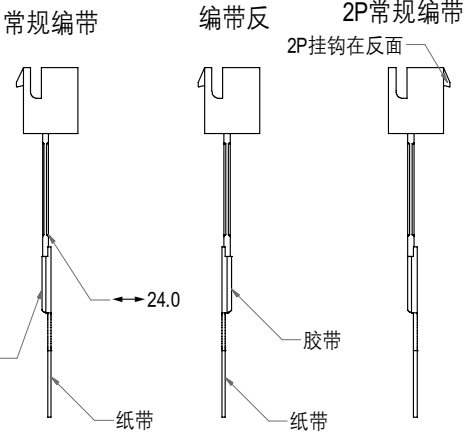

Poles	Part No.	Description	DIM=A	DIM=B	DIM=C	DIM=D	DIM=E
2	A2507-WVG02	XHD-2A编带装	2.50	7.50	2.00	12.70	2.50
3	A2507-WVG03	XHD-3A编带装	5.00	10.00	3.00	12.70	2.50
4	A2507-WVG04	XHD-4A(1.3长针)编带装(空)	7.50	12.50	3.00	25.40	2.50
4	A2507-WVG04-B	XHD-4A(1.3长针)编带装(并)	7.50	12.50	3.00	12.70	2.50
4	A2507-WVG04	XHD-4A(2.4长针)编带装(空)	7.50	12.50	3.00	25.40	5.00
4	A2507-WVG04-B	XHD-4A(2.4长针)编带装(并)	7.50	12.50	3.00	12.70	5.00
4	A2507-WVCG04	XHD-4A宽扣(1.3长针)编带装(空)	7.50	12.50	3.00	25.40	2.50
5	A2507-WVG05	XHD-5A(2.4长针)编带装	10.00	15.00	4.50	25.40	5.00
6	A2507-WVG06	XHD-6A(2.4长针)编带装	12.50	17.50	4.50	25.40	5.00
7	A2507-WVG07	XHD-7A(3.5长针)编带装	15.00	20.00	4.50	25.40	7.50
8	A2508-WVG08	XHD-8A(3.5长针)编带装	17.50	22.50	4.50	25.40	7.50
2	A2507-WVG02-F	XHD-2A编带装(反)	2.50	7.50	2.00	12.70	2.50
3	A2507-WVG03-F	XHD-3A编带装(反)	5.00	10.00	3.00	12.70	2.50
4	A2507-WVG04-F	XHD-4A(1.3长针)编带装(空)(反)	7.50	12.50	3.00	25.40	2.50
4	A2507-WVG04-B-F	XHD-4A(1.3长针)编带装(并)(反)	7.50	12.50	3.00	12.70	2.50
4	A2507-WVG04-F	XHD-4A(2.4长针)编带装(空)(反)	7.50	12.50	3.00	25.40	5.00
4	A2507-WVG04-B-F	XHD-4A(2.4长针)编带装(并)(反)	7.50	12.50	3.00	12.70	5.00
4	A2507-WVCG04-F	XHD-4A宽扣(1.3长针)编带装(空)(反)	7.50	12.50	3.00	25.40	2.50
5	A2507-WVG05-F	XHD-5A(2.4长针)编带装(反)	10.00	15.00	4.50	25.40	5.00
6	A2507-WVG06-F	XHD-6A(2.4长针)编带装(反)	12.50	17.50	4.50	25.40	5.00
7	A2507-WVG07-F	XHD-7A(3.5长针)编带装(反)	15.00	20.00	4.50	25.40	7.50
8	A2508-WVG08-F	XHD-8A(3.5长针)编带装(反)	17.50	22.50	4.50	25.40	7.50



针座3D图示

LHE® 浙江联和电子有限公司			
品名	XHD-A编带装	比例	5 : 4
料号	A2507-WVG	未注公差(mm)	
图号	LHE\GC-48	>0~3	±0.12
材料	Nylon 66 UL94V-0	>3~18	±0.15
制图	王天 2024-03-06	>18~50	±0.3
审核	天琴 2024-03-06	>50~120	±0.5
批准	李育文 2024-03-06	X°	±3°
视角		X.X°	±0.5°