


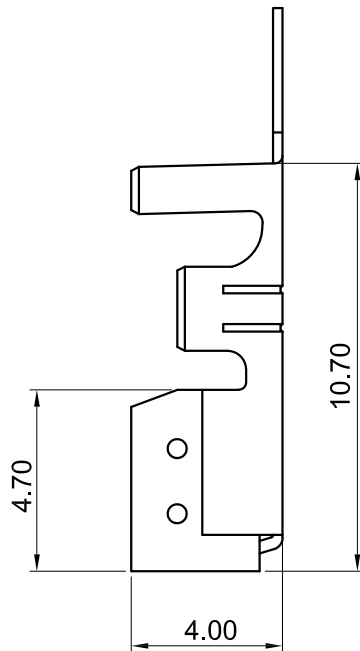


35156型端子承认图面

REV	SYM	REVISION RECORD	DR.	APPR.	DATE
A/0		原始版本			A/0
A/1		取消端子表面处理说明	YF		20220311
A/2	①	高低温环境测试从85°C, 更新到105°C	YF		20221027

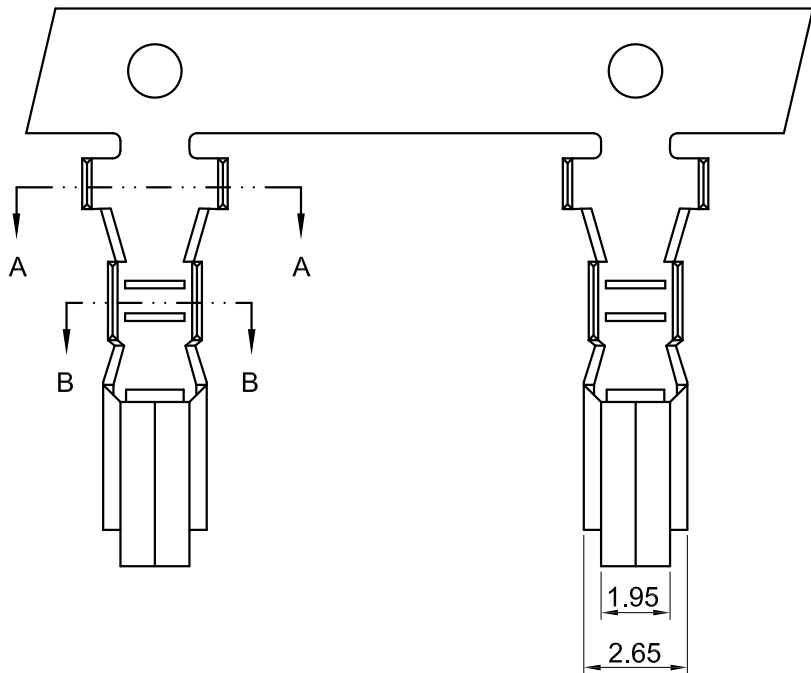

SEC:A-A



SEC:B-B

主要技术参数 Main Specifications

线数 (poles): 2 to 16P
额定电流 (Current rating): 5.0A AC, DC
额定电压 (Voltage rating): 250V AC, DC
温度范围 (Temperature range): -25°C to +105°C ①
接触电阻 (Contact resistance): ≤10mΩ
绝缘电阻 (Insulation resistance): ≥1000MΩ
耐电压 (Withstand voltage): 1500V AC/minute
适用线规 (Applicable wire): AWG #22 to #18
适用基板厚度 (Applicable PC board thickness): 1.6mm

Part No.		Material	Finish	Qty/reel
A3964-T	35156-YT	Phosphor Bronze	TIN	50000pcs

未注公差				LHE® 浙江联和电子有限公司				
X.° ±3° X.X° ±0.5°				ZHEJIANG LIANHE ELECTRONICS CO., LTD				
>0-3	>3-18	>18-50	>50	单位	比例	Design Units	SIZE	页码
±0.12	±0.15	±0.3	±0.5	MM Only	—	METRIC	A4	
制作	审核	批准	材料	图号	Part No			
			见图解	品名	35156-YT (96)			