


A4205型连接器承认书图面

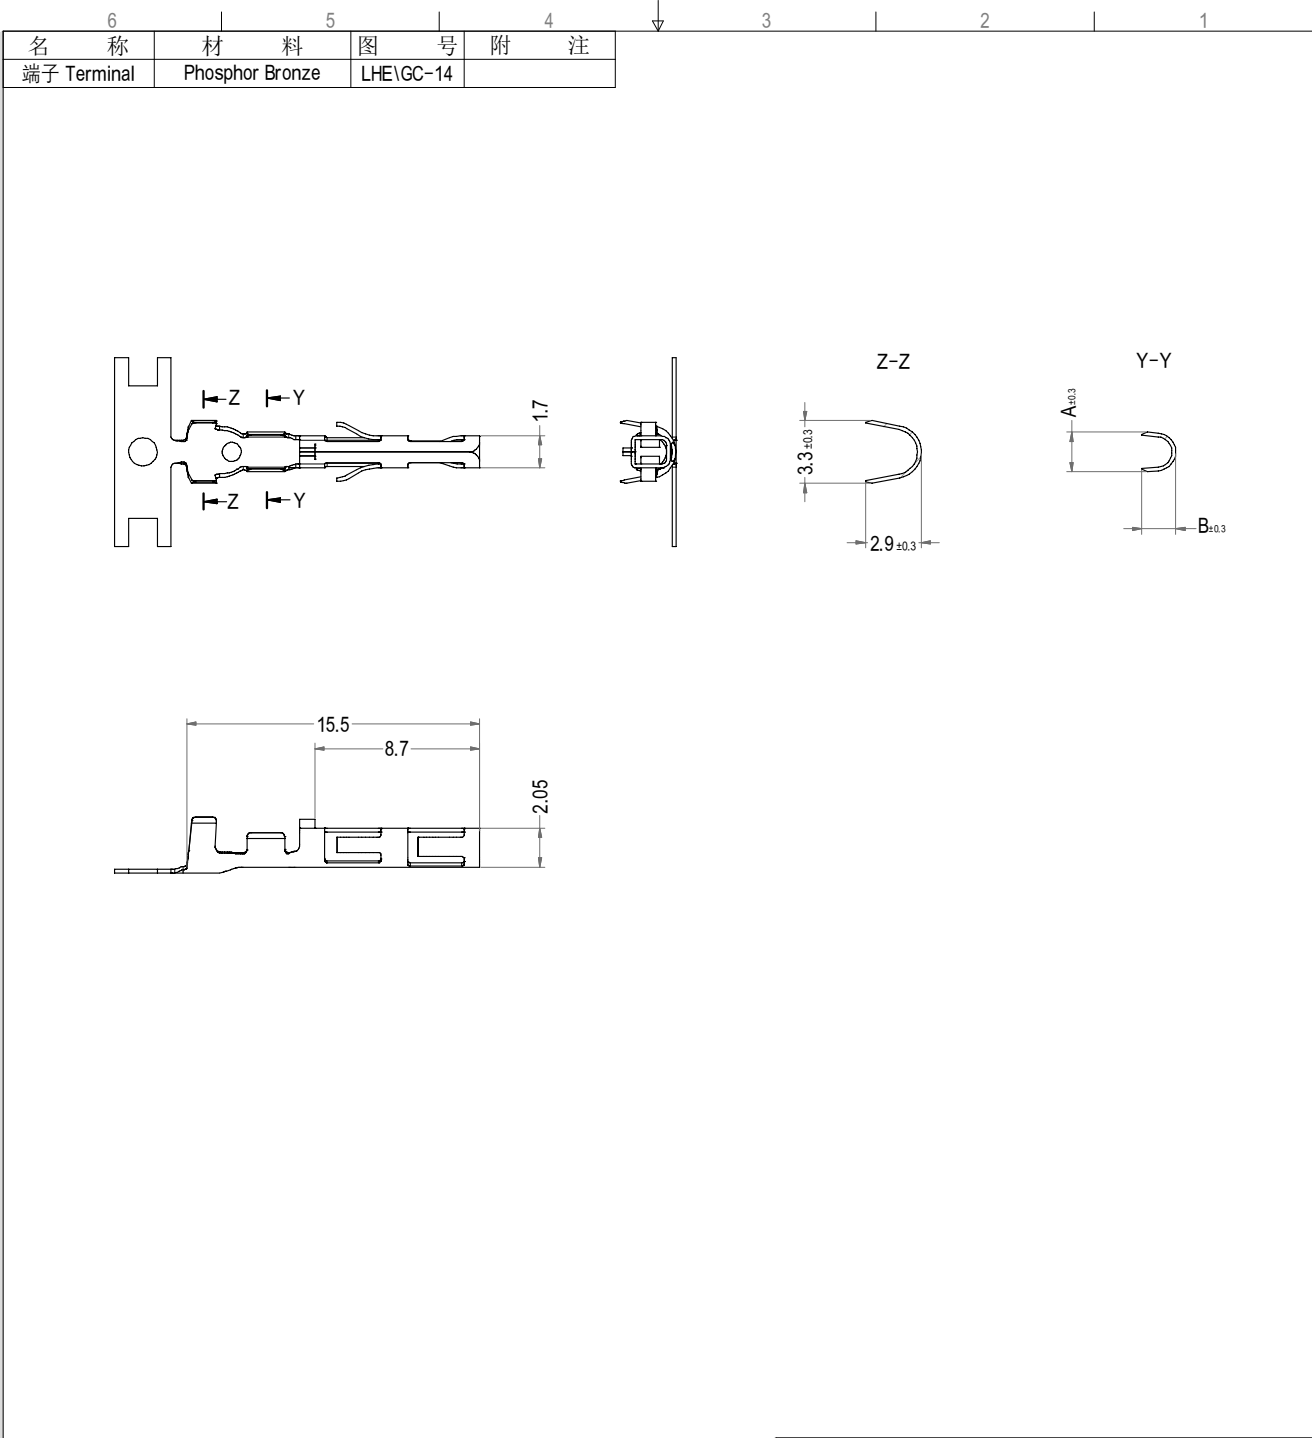

技术要求:  
1、此产品为先冲后镀

| Prat No.   | Description | A    | B    | Wire Range     | Finish | Qty/reel |
|------------|-------------|------|------|----------------|--------|----------|
| A4205-TP   | A4205-T11   | 2.10 | 1.80 | AWG #22 to #20 | Tin    | 5000pcs  |
| A4205-T12P | A4205-T12   | 1.60 | 1.50 | AWG #24 to #22 | Tin    | 5000pcs  |
| A4205-T13P | A4205-T13   | 2.10 | 2.00 | AWG #20 to #18 | Tin    | 5000pcs  |

| LHE® 浙江联和电子有限公司 |                 |           |       |
|-----------------|-----------------|-----------|-------|
| 品名              | A4205-T         | 比例        | 5 : 2 |
| 料号              | A4205-TP        | 未注公差 (mm) |       |
| 图号              | LHE\GC-14       | >0~3      | ±0.12 |
| 材料              | Phosphor Bronze | >3~18     | ±0.15 |
| 制图              | 石 斛 2024-03-14  | >18~50    | ±0.3  |
| 审核              | 天 琴 2024-03-14  | >50~120   | ±0.5  |
| 批准              | 季育文 2024-03-14  | X°        | ±3°   |
| 视角              |                 | X.X°      | ±0.5° |