


● Technical data

Rated supply voltage	AC 220V
Operation voltage range	AC 80V~350V
Rated frequency	50/60Hz
Error	2%
>U and <U trip delay	0.5S
Reset/start delay	1s~300s
Voltage measurement accuracy	1%(Not exceeding 1% of the overall range)
Rated insulation voltage	400V
Output contact	1NO
Electrical life	10 ⁵
Mechanical life	10 ⁶
Protection degree	Ip20
Pollution degree	3
Altitude	≤2000m
Operatintg temperature	-50℃~55℃
Humidity	≤50%at40℃(without condensation)
Storage temperature	-30℃~70℃


● Default setting

Technical parameter	Setting range	Step	Factory setting
Overcurrent trip value	1~63A	1A	20A
Reset/start delay	1s~300s	1s	5s

Current specification	15A	25A	32A	50A	63A
Rated operating current(In,A)	15	25	32	50	63
Maximum operating current I _{max} (A,within 10min)	25	30	40	60	80
Max.power of load(kW)	3.6	5.5	7	11	13.9

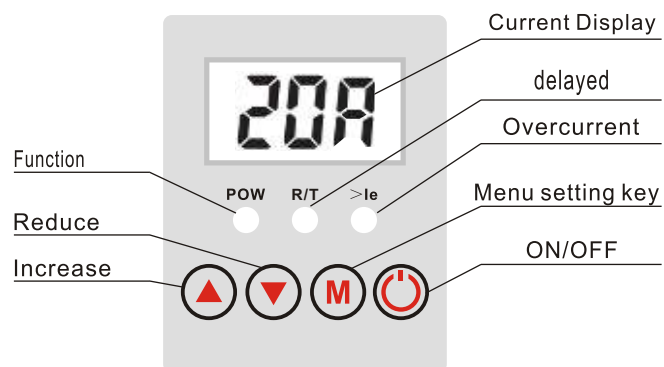

● Function setting

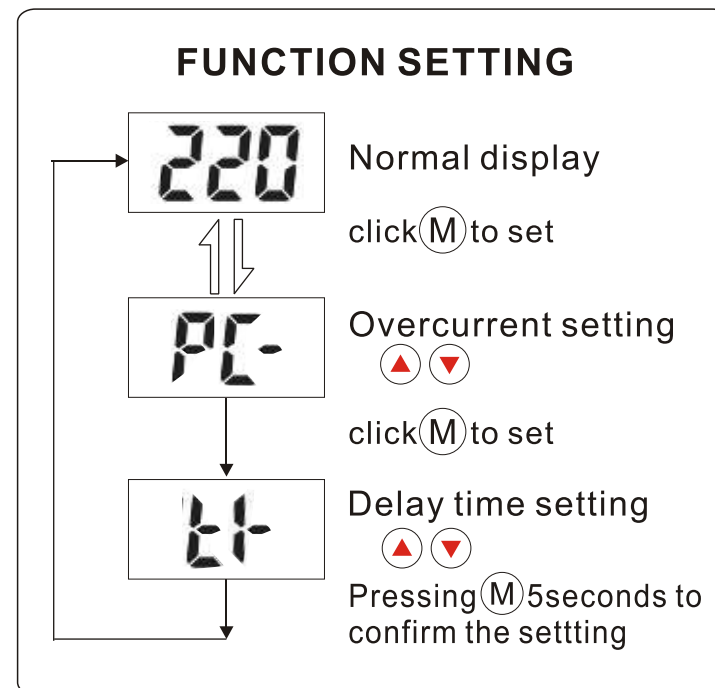

● Wiring and shape dimensions

