



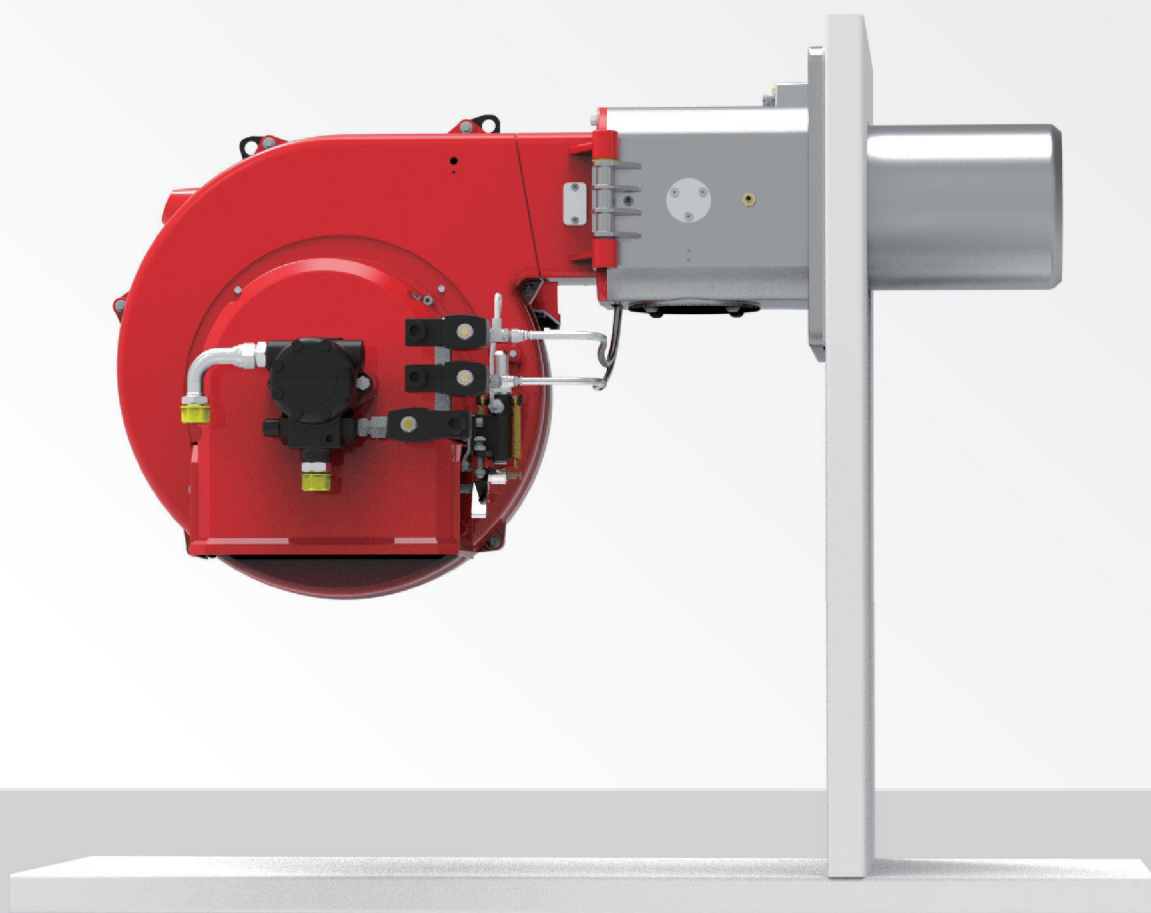

产品型号规格定义

Product Model Specification Definition

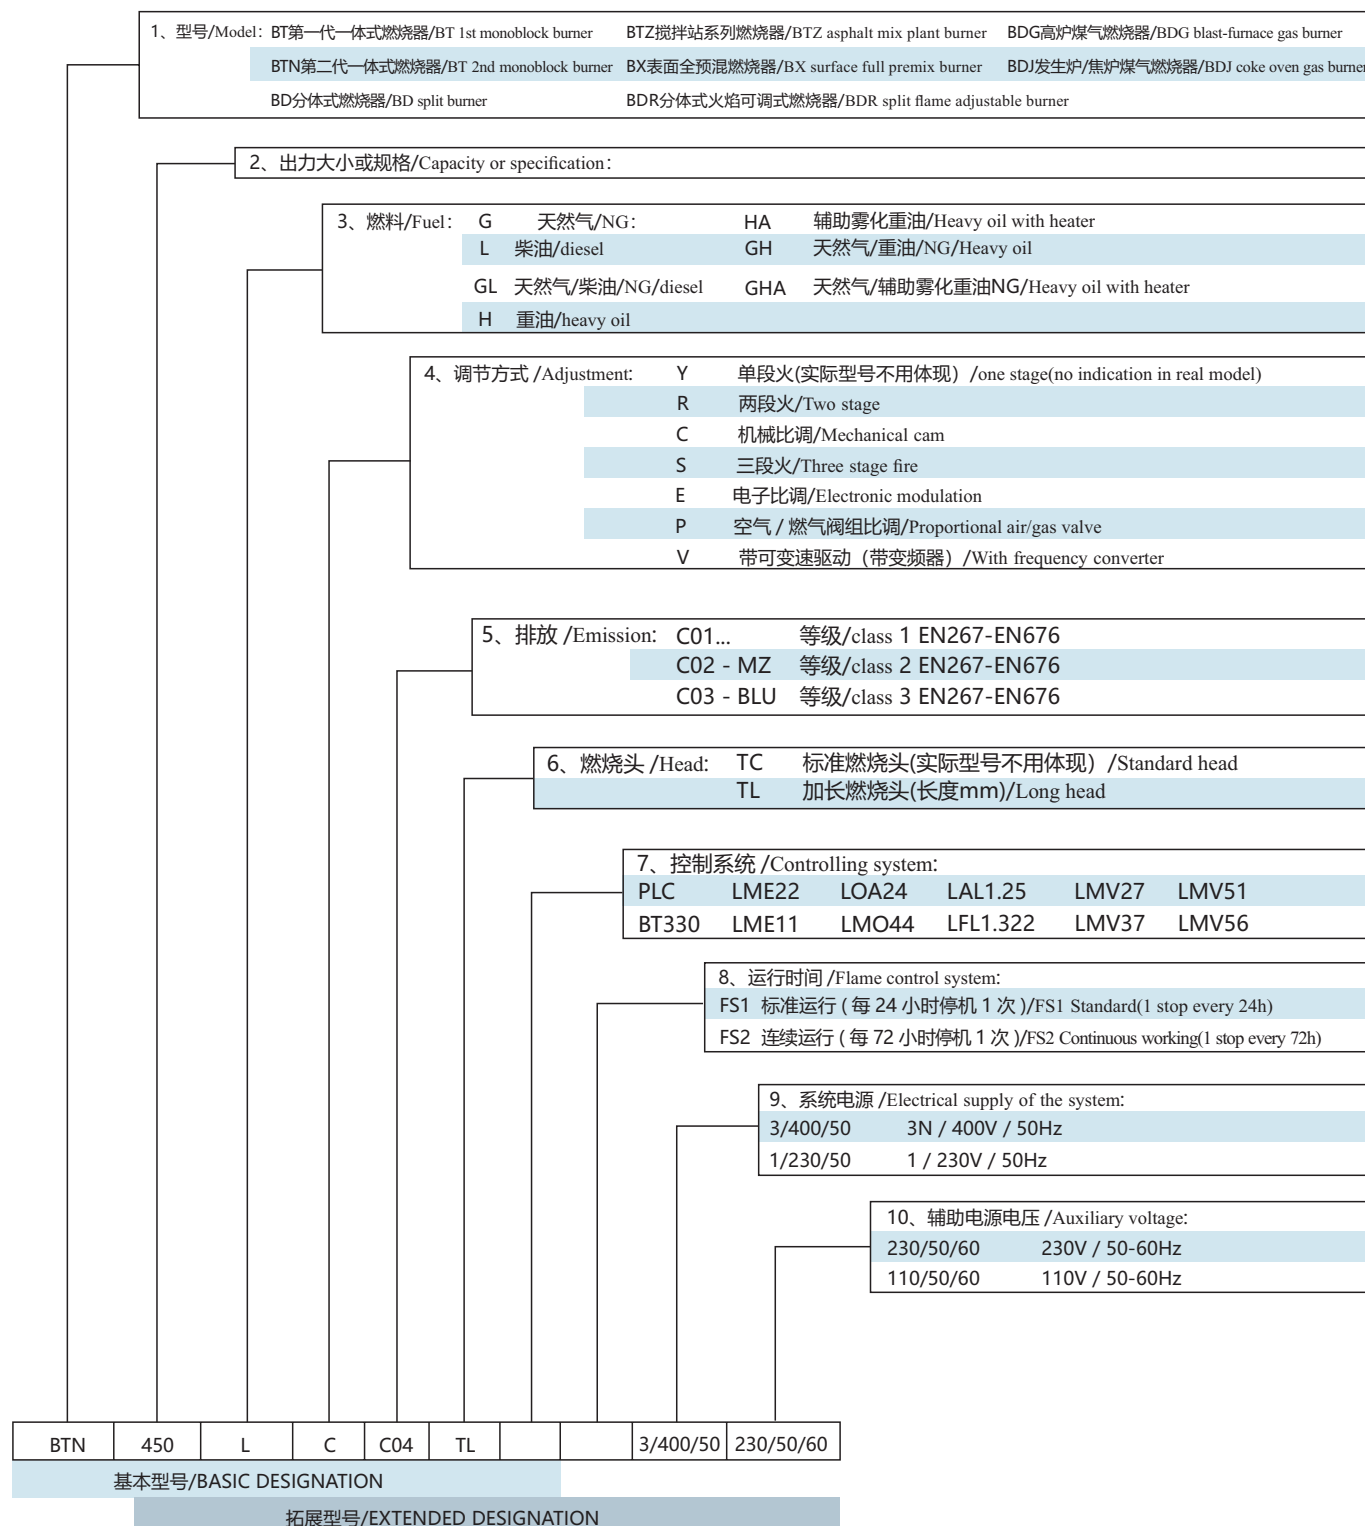

BTN800/1000LC/LE 比例调节/电子比调轻油燃烧器

技术性能及结构特征

Technical performance and structural characteristics

1. 轻油燃烧器。

2. 双段渐近式/比例式/电子式运行。

3. 机械式压力雾化。

4. 通过调节燃烧空气和燃烧头，可以获得最佳的燃烧参数。

5. 铰链式连接，可左右自然打开，维修保养方便。

6. 渐近式/比例式用伺服电动机来进行第一、二段空气流量调节。

7. 电子比调式用两个伺服电机分别控制燃油和空气的比例调节。

8. 燃烧器暂停时，风门关闭以减少炉内热量损失。

9.带有凸轮的伺服电机可以同时调节空气和燃料的供应。

10.采用一个法兰和耐高温隔热垫与锅炉联接固定。

11.耐高温的不锈钢燃烧头火焰盘。

12.独立三相电机带动油泵。

13.光敏电阻检测火焰。

14.标准配置的电气防护等级IP40。
1. Light oil burner.

2. Two stage progressive /modulation/electronic modulation operation.

3. High pressure mechanical atomisation of fuel using nozzle.

4. Ability to obtain optimal combustion values by regulating combustion air and blast-pipe.

5. Hinge joint ,open at both side ,easy for maintenance.

6. Sliding/modulating Minimum and maximum air flow regulation for first and second stage by means of electric servomotor with pause closure of gate to prevent any heat dispersion to flue.

7. Electronic with two servo motor control the proportion of fuel and air regulation.

8. Pauses burner, air door closed in order to reduce heat loss in the furnace.

9.The servo motor which fixed with a cam can adjust the consumption for fuel and air.

10. It adapts one flange and heat-resistance insulated pad to connect with boiler.

11. High temperature resistant stainless steel burner diffuse.

12. Independent three-phase motor driven oil pump.


13. Photocell detects the flame.

14. Electrical plant protection rating IP40.

功率 Power (KW)	型号 Model	订货编号 Order number	电源 Power supply	电机功率 Motor power (KW)	包装尺寸 package size (LxPxHmm)	重量 weight (kg)
1905~8750	BTN800LC	202 20 054	380V 50Hz	18.5	/	/
	BTN800LE	202 20 076			/	/
1905~10900	BTN1000LC	202 20 055	380V 50Hz	22	/	/
	BTN1000LE	202 20 077			/	/

外观尺寸图

Exterior dimensional drawing

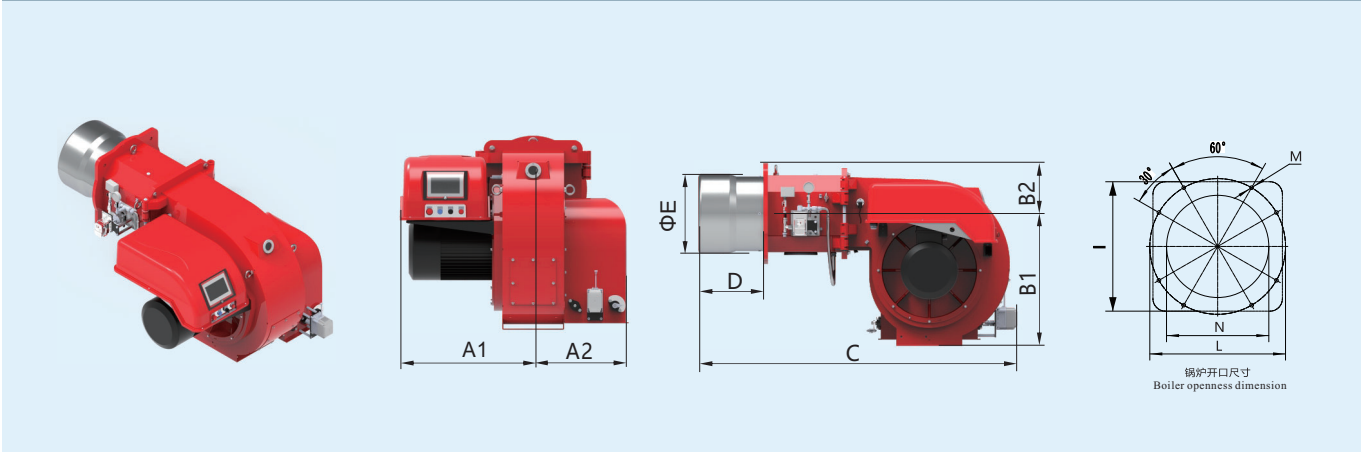

型 号 model	A1	A2	B1	B2	C	D	E	I	L	M	N
	mm	mm	mm	mm	mm	mm	Φmm	mm	Φmm	M	Φmm
BTN800LC/LE	757	585	802	305	1950	397	480	608	560	4-M20	Φ490
BTN1000LC/LE	757	585	802	305	1950	397	480	608	560	4-M20	Φ490

BTN 800/1000LC/LE Modulation/electronic Modulation Light Oil Burner

baite

备选功能

Alternative function

加长的燃烧筒，可定制60Hz

Extended combustion cylinder, customizable 60Hz

标准配件


standard fittings

过滤器-软管-喷嘴-与锅炉配套的组件

Filter - Hose - Nozzle - assembly for boiler

曲线图

curve graph

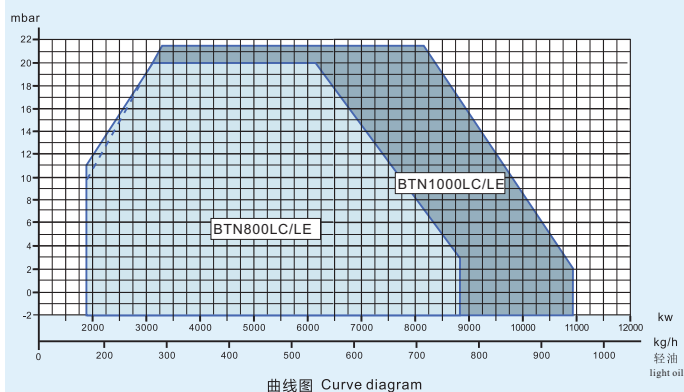

曲线图 Curve diagram



浙江百特燃烧器有限公司

ZHEJIANG BAITE BURNERS MANUFACTURE CO., LTD

地址/ADD: 浙江省乐清市象阳工业区百特路2号

NO.2 BAITE RD.XIANGYANG INDUSTRIAL PARK ,YUEQING CITY ,ZHEJIANG PROVINCE

电话/TEL: 0086-577-62655355 62652355

传真/FAX: 0086-577-62653955

服务热线/Hotline:

400 001 5556

网址/Web: www.baite.cn

邮箱/Mail: bt@baite.cn



请用微信扫一扫
进入公司官方网站

© 浙江百特燃烧器有限公司版权所有 2024 珍惜资源，善待环境

本目录所载产品尺寸、规格仅供参考，若有变更，恕不另行通知！以本公司提供的产品为准！

BAITE BURNERS KEEPS THE REVISION RIGHT WITHOUT INFORM IN ADVANCE.INCLUDING THE PRODUCT DIMENSION,SPECIFICATION!