


FILE: 2011-002V1L02					
产品代号/Part NO.	线径/Wire Diameter		ΦA	ΦB	标示图 (Go.)
	mm ²	AWG			
UL0-CESM-016-0.37	0.14-0.37	26-22	1.8	0.90	Go. 1
UL0-CESM-016-0.5	0.5	20	2.6	1.10	Go. 1
UL0-CESM-016-0.75	0.75	18	2.6	1.30	Go. 2
UL0-CESM-016-1.0	1.0	18	2.6	1.45	Go. 3
UL0-CESM-016-1.5	1.5	16	3.0	1.75	Go. 4
UL0-CESM-016-2.5	2.5	14	3.5	2.25	Go. 5
UL0-CESM-016-3.0	3.0	12	3.7	2.55	Go. 1
UL0-CESM-016-4.0	4.0	12	3.9	2.85	Go. 1

REV	E.C.N NO.		CONTENT			CHK	DATE
Go.	Go. 1	Go. 1	Go. 2	Go. 3	Go. 4	Go. 5	Go. 1
刻槽位置							

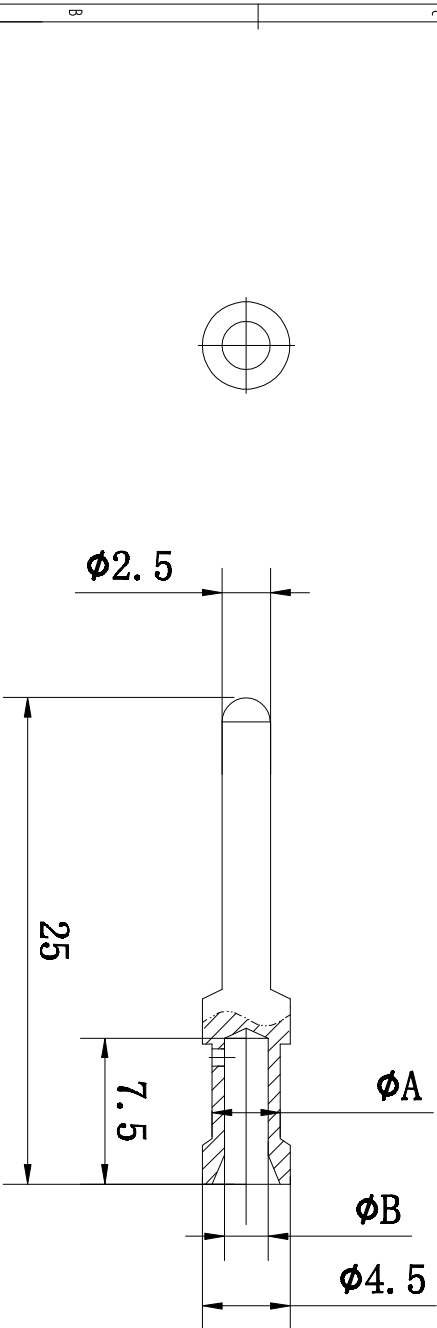

Technical specification:

1. Material: Copper alloy
2. Surface: hard-silver plated
3. Rated Current: 16A
4. Contact resistance: $\leq 1m\Omega$
5. Wire gauge: 0.14-4.0mm² (26-12AWG)
6. Mechanical working life (mating cycles): ≥ 500

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE	
DWG.	SWL	DATE	2023.12.19	MM	SHEET/OF	1/1
CHK.	DATE	DATE		SCALE	A4	
APP.	DATE			NAME	UL0-CESM-016-XX	
				DWGNO.		

NINGBO UL0 ELECTRONICS CO.,LTD.
宁波欧路电子有限公司