


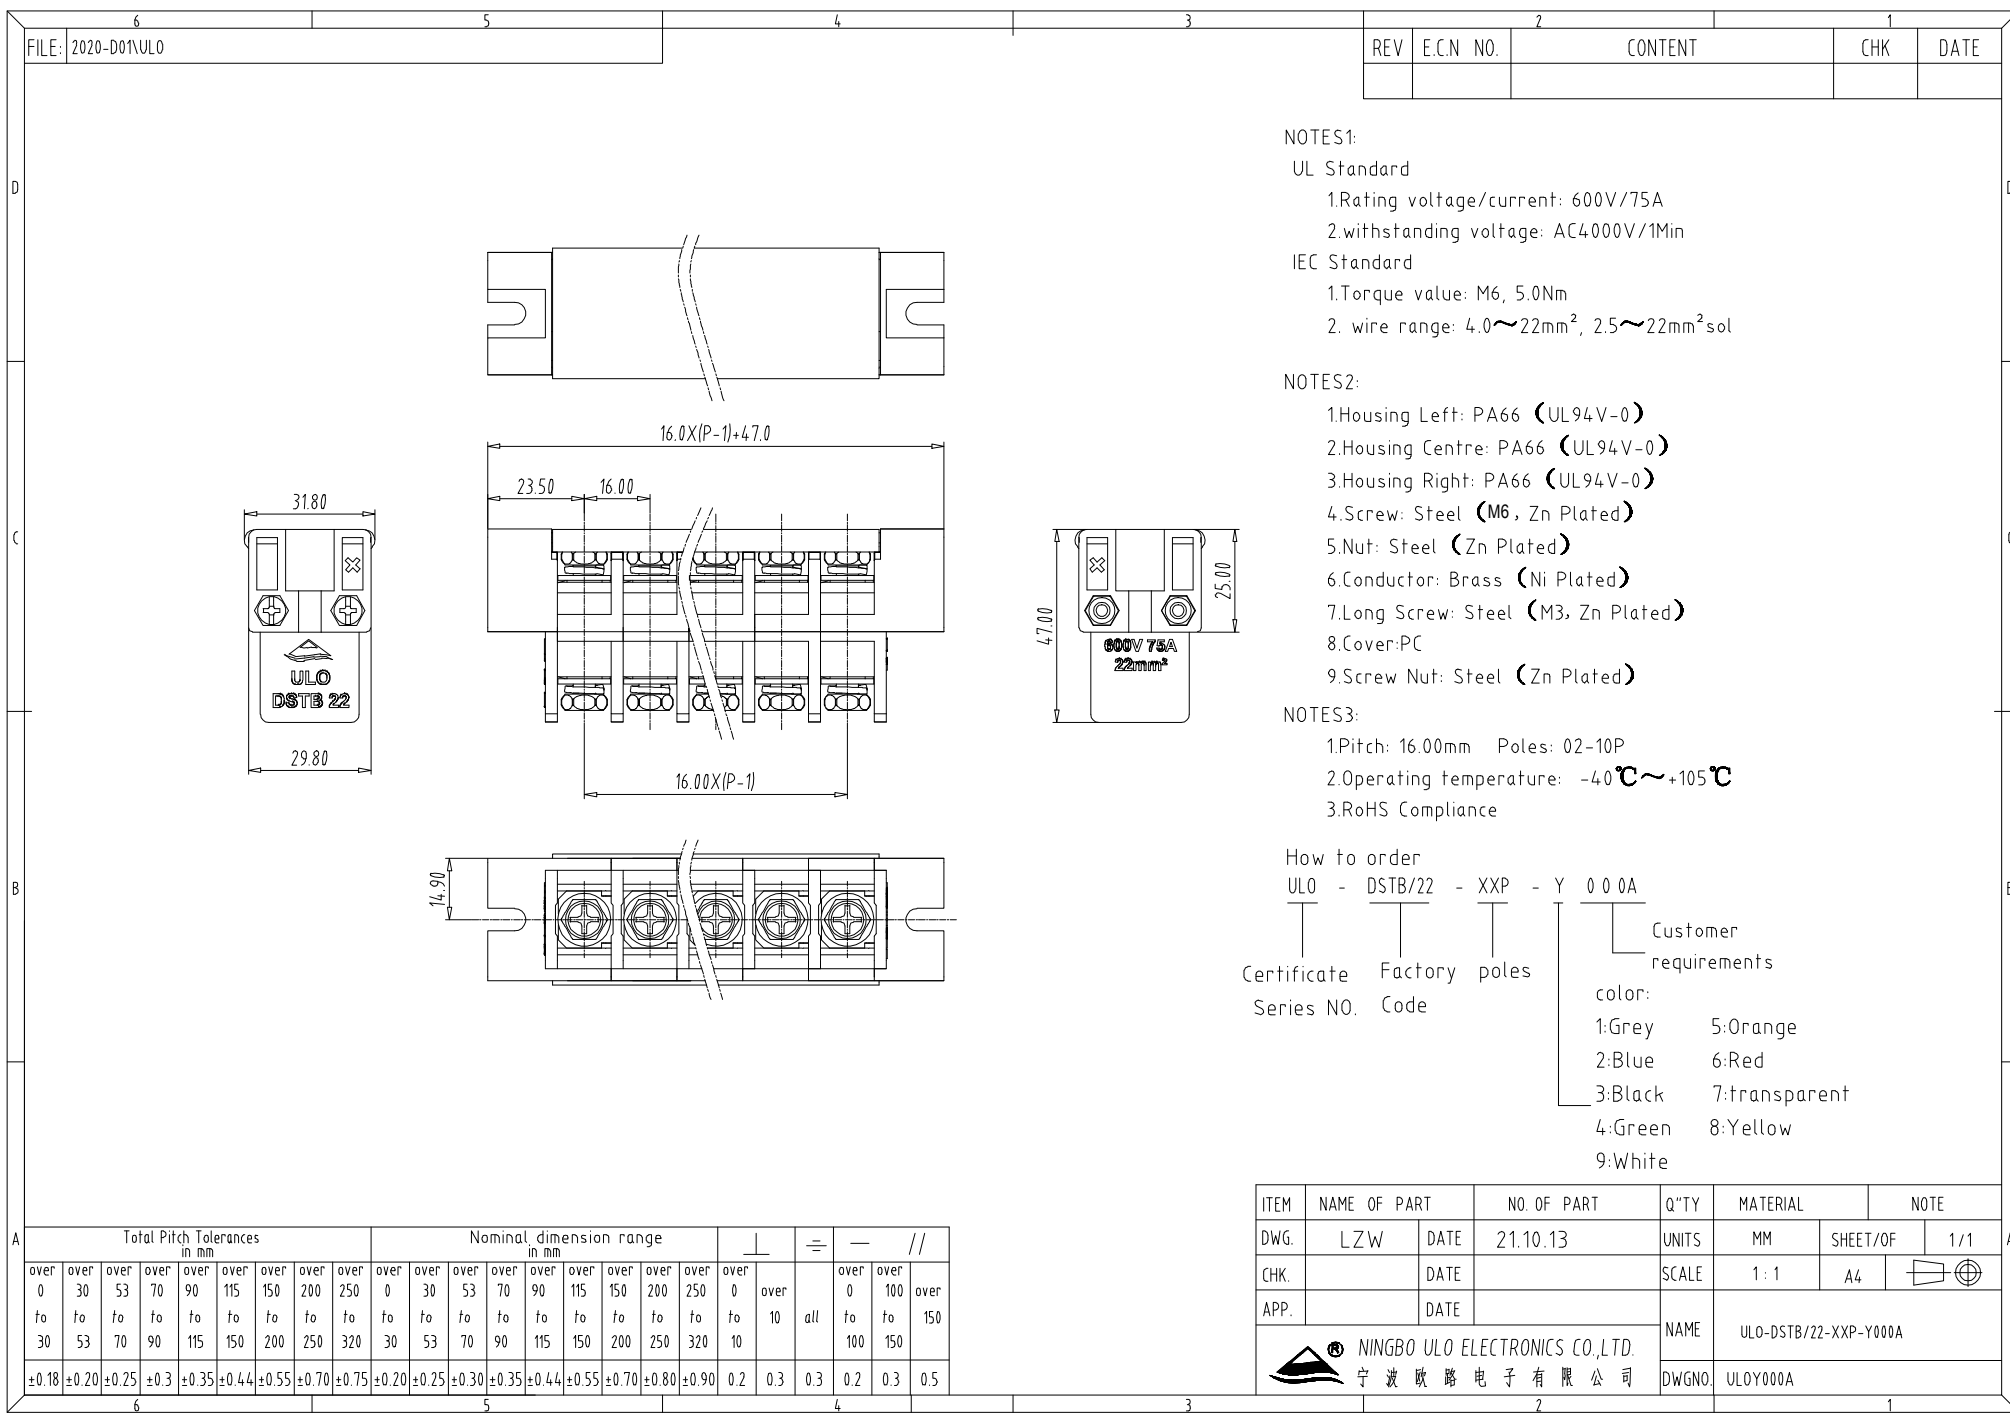

FILE: 2020-D01VULO

REV	E.C.N NO.	CONTENT	CHK	DATE

NOTES1:

UL Standard

- 1.Rating voltage/current: 600V/75A
- 2.withstanding voltage: AC4000V/1Min

IEC Standard

- 1.Torque value: M6, 5.0Nm
2. wire range: 4.0~22mm², 2.5~22mm²sol

NOTES2:

- 1.Housing Left: PA66 (UL94V-0)
- 2.Housing Centre: PA66 (UL94V-0)
- 3.Housing Right: PA66 (UL94V-0)
- 4.Screw: Steel (M6, Zn Plated)
- 5.Nut: Steel (Zn Plated)
- 6.Conductor: Brass (Ni Plated)
- 7.Long Screw: Steel (M3, Zn Plated)
- 8.Cover:PC
- 9.Screw Nut: Steel (Zn Plated)

NOTES3:

- 1.Pitch: 16.00mm Poles: 02-10P
- 2.Operating temperature: -40℃~+105℃
- 3.RoHS Compliance

How to order

ULO - DSTB/22 - XXP - Y 0 0 0 A

Certificate Series NO. Factory Code poles Customer requirements color:
1:Grey 5:Orange
2:Blue 6:Red
3:Black 7:transparent
4:Green 8:Yellow
9:White

A	Total Pitch Tolerances in mm									Nominal dimension range in mm								$\perp$		$\equiv$		$—$		$//$	
	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 30	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 30	over 10	all	over 0	over 100	over 150	
	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 10			to 100	to 150		
	±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5	

ITEM	NAME OF PART		NO. OF PART	Q"TY	MATERIAL		NOTE	
DWG.	LZW	DATE	21.10.13	UNITS	MM	SHEET/OF		1/1
CHK.		DATE		SCALE	1:1	A4		
APP.		DATE			NAME ULO-DSTB/22-XXP-Y000A			
 NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司				DWGNO.				