





DXAT Series waterproof distribution box

Product application diagram

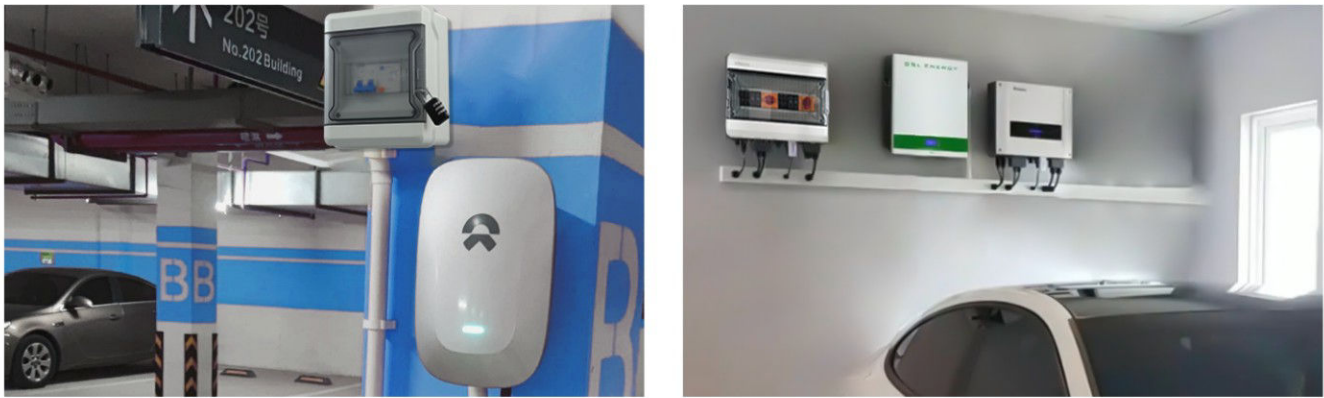

Dimensional diagram

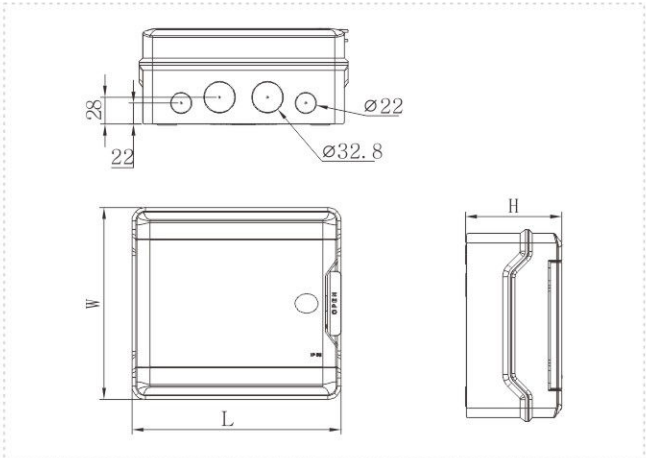

Product material description

- The bottom shell and surface frame are made of PC new material, while the transparent cover is made of PC new material, which has characteristics such as good toughness, high strength, good impact resistance, and long service life.
- Suitable for various indoor and outdoor places such as waterproof, dustproof, and anti-corrosion
- Executive standard: GB/T 17466.1; GB/T 17466.24; IEC 60529 IP65

DXAT series surface mounted waterproof distribution box product data summary table

Serial Number	Model and name	Number of circuits	Number of rows	Overall dimensions (mm) (L*W*H)	Zero and ground busbar configuration	Outer box size (mm) (L*W*H)	Gross weight of the entire box (kg)	Number of boxes (pieces)
1	DXAT-4 Exposed waterproof distribution box	4way	Single Row	128*200*100	Zero row: 3 holes Ground row: 3 holes	545*425*555	21.5	40
2	DXAT-6 Exposed waterproof distribution box	6way		164*200*100	Zero row: 5 holes Ground row: 5 holes	545*425*530	17.8	30
3	DXAT-9 Exposed waterproof distribution box	9way		218*200*100	Zero row: 5 holes Ground row: 5 holes	545*425*465	16.2	20
4	DXAT-13 Exposed waterproof distribution box	13way		296*230*120	Zero row: 8 holes Ground row: 8 holes	622*520*490	17.6	16
5	DXAT-15 Exposed waterproof distribution box	15way		332*230*120	Zero row: 8 holes Ground row: 8 holes	645*357*490	13.8	10
6	DXAT-18 Exposed waterproof distribution box	18way		380*230*120	Zero row: 8 holes Ground row: 8 holes	645*405*490	15.5	10
7	DXAT-26 Exposed waterproof distribution box	26way	Double Row	296*390*130	Zero row: two 8 holes Ground row: two 8 holes	642*425*415	19.2	6
8	DXAT-39 Exposed waterproof distribution box	39way	Three Rows	296*550*130	Zero row: two 8 holes Ground row: two 8 holes	565*315*146	2.7	1



SMART GRID
SOLUTION LEADER

- Charging station distribution box
- Photovoltaic distribution box
- Energy storage distribution box





Product Benefit Description

IP65 protection level
The surface cover and bottom shell are wrapped with waterproof sealing strips, providing better waterproof performance

Lock buckle structure
Thickened lock positions on the face frame and cover make the structure more secure

Hinge structure of the cover
1. Opening angle of the cover $\geq 115^\circ$;
2. The cover can be fixed when opened at the maximum angle;
3. Face cover closure and closing life ≥ 500 times

Accessory bag installation package
Attachment package contains:
4 pieces $\phi 6 \times 30$ plastic Expansion tube+4 M4 $\times$ 25 self tapping screws

Equipped with circuit baffle
The left and right sides of the face frame are equipped with circuit baffles, Partial filling function and easy disassembly

Loose frame structure
1. The fixed face frame is a non loosening screw, and after loosening the face frame, the screw will not be missed 2. Fixed screws on the outer side of the waterproof strip for better waterproof performance

Multi ring knockout hole
Knock off the surface of the hole with lettering for easy selection of lines Specification of cable joint and reserved hole opener Positional aperture


Copper terminal assembly
The terminal block can pass the 960 $^\circ\text{C}$ hot wire test with guaranteed safety performance

DXHT Series waterproof distribution box

© Product application diagram



© Dimensional diagram

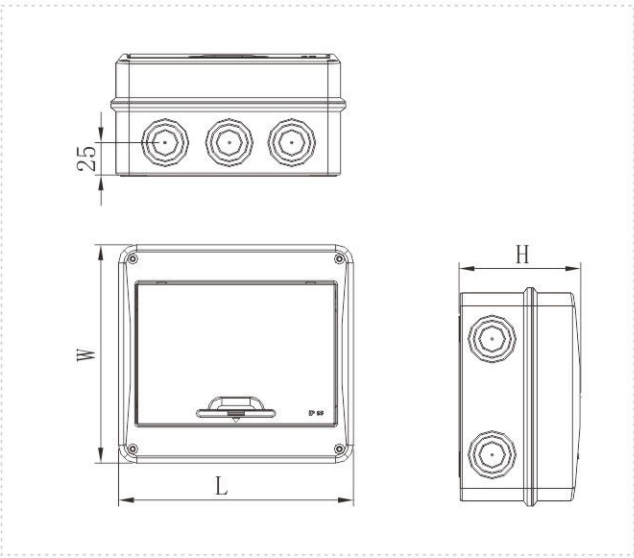

© Product material description

- The bottom shell and surface frame are made of ABS new material, while the transparent cover is made of PC new material, which has characteristics such as good toughness, high strength, good impact resistance, and long service life.
- Suitable for various indoor and outdoor places such as waterproof, dustproof, and anti-corrosion
- Executive standard: GB/T 17466.1; GB/T 17466.24; IEC 60529 IP65

© DXHT series surface mounted waterproof distribution box product data summary table

Serial Number	Model and name	Number of circuits	Number of rows	Overall dimensions (mm) (L*W*H)	Zero and ground busbar configuration	Outer box size (mm) (L*W*H)	Gross weight of the entire box (kg)	Number of boxes (pieces)
1	DXHT-5 Exposed waterproof distribution box	5way	Single Row	129*170*95	Zero row: 3 holes Ground row: 3 holes	555*365*520	18.2	40
2	DXHT-8 Exposed waterproof distribution box	8way		183*170*95	Zero row: 5 holes Ground row: 5 holes	520*390*545	17.8	30
3	DXHT-12 Exposed waterproof distribution box	12way		255*200*105	Zero row: 8 holes Ground row: 8 holes	570*425*540	18	20
4	DXHT-15 Exposed waterproof distribution box	15way		309*200*105	Zero row: 8 holes Ground row: 8 holes	625*460*430	17.3	16
5	DXHT-18 Exposed waterproof distribution box	18way		363*200*110	Zero row: 8 holes Ground row: 8 holes	575*383*430	12.6	10



Product Benefit Description

IP65 protection level
1. The surface cover and bottom shell are wrapped with waterproof sealing strips, providing better waterproof performance
2. Fix screws inside the waterproof strip to improve waterproofing performance

Lock buckle structure
Thickened lock positions on the face frame and cover make the structure more secure

Reserved function sticker position
Reserve a position for functional stickers on the face frame, and after applying the functional stickers, clearly view the control area of the components

Latch function
Reserved installation of anti-theft lock

Circuit baffle structure
The left and right sides of the face frame are equipped with circuit baffles, which have partial filling function and are easy to disassemble

Loose frame structure
The fixed face frame is a non loosening screw, and after loosening the face frame, the screw will not be missed

Knockout hole
Surface lettering facilitates the selection of cable connector specifications and leaves holes for the positioning of the hole opener

Copper terminal assembly
The terminal block can pass the 960 $^\circ\text{C}$ hot wire test with guaranteed safety performance