

DZ47-63 Mini Circuit Breaker



1. Application

MCB is applicable to a line of AC 50Hz,230V in single pole,400V in double,three,four poles for protecting overload and short circuit, and rated current up to 63A. It can also be used for infrequent line conversion under the normal condition.The breaker is applicable to lighting distribution system in industrial enterprise, commercially district, high-rise building and dwelling house. It conforms with the standards of IEC60898.

2. Main technical parameter

Type	MCB			
Pole	1P		2P, 3P, 4P	
Rated current (A)	6,10,16,20,25,32,40,50,63			
Rated voltage(V)	230		400	
Ambient temperature	-5℃~+40℃			
Type of instantaneous release	C	D	C	D
Rated short circuit breaking capacity Icn(KA)	1-32A: 6 50-63A:4.5	4.5	1-32A: 6 50-63A:4.5	4.5


3. Applicable conducting wire

Rated current(A)	Normal cross section of wire mm ²
1-6A	1
10A	1.5
16,20A	2.5
25A	4
32A	6
40,50A	10
63A	16


4. The over-current protection property

Ambient Temperature	Initial Status	Test Current	Expected Result	Expected Result	Note
30 ± 2°C	Cold position	1.13In	$t \leq 1h$	Non-release	-
	Carried out immediately after previous test	1.45In	$t < 1h$	Release	-
	Cold position	2.55In	$1s < t < 60s$ ($In \leq 32A$)	Release	Current smoothly rises to specified value within 5s
	Cold position	2.55In	$1s < t < 120s$ ($In > 32A$)	Release	
-5~+40°C	Cold position	3In	$t \leq 0.1s$	Non-release	Type B
	Cold position	5In	$t < 0.1s$	Release	Type B
	Cold position	5In	$t \leq 0.1s$	Non-release	Type C
	Cold position	10In	$t < 0.1s$	Release	Type C
	Cold position	10In	$t \leq 0.1s$	Non-release	Type D
	Cold position	20In	$t < 0.1s$	Release	Type D

Inside view

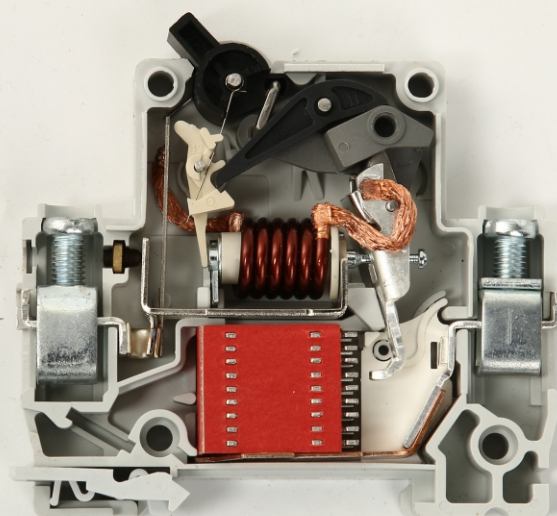

DZ47-63(C45)-A

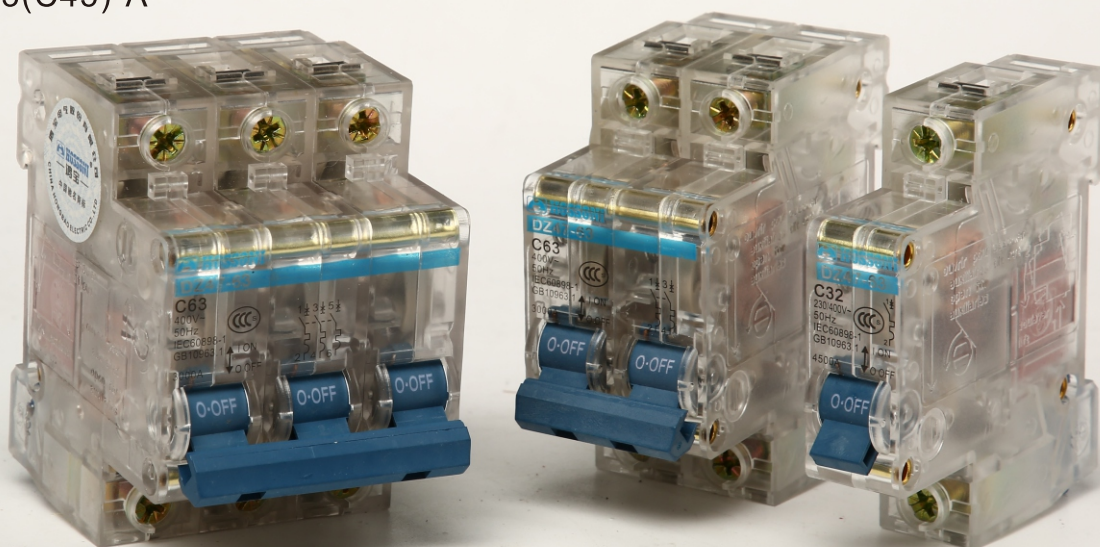

DZ47-63(C45)-B



Mini Circuit Breaker

DZ47-63(C45)-C




DZ47-63(C45)-D



DZ47-63(C45)-E



DZ47-63(C45)-F

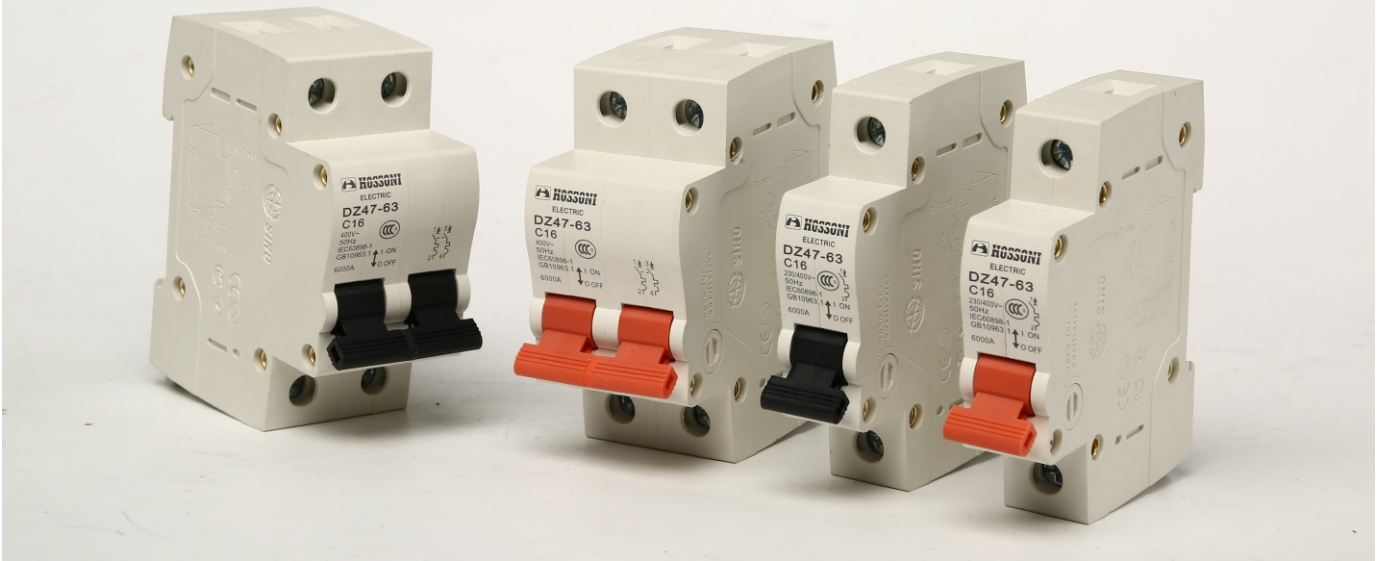

DZ47-63-D(C45-D)



C65

