
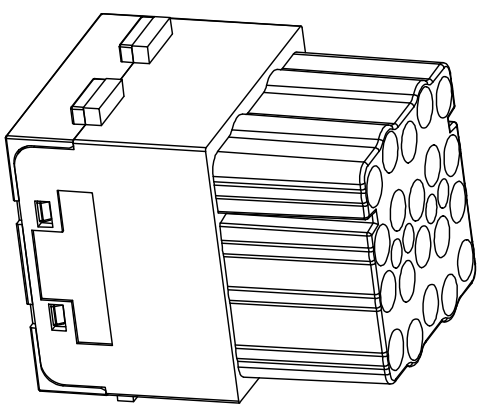


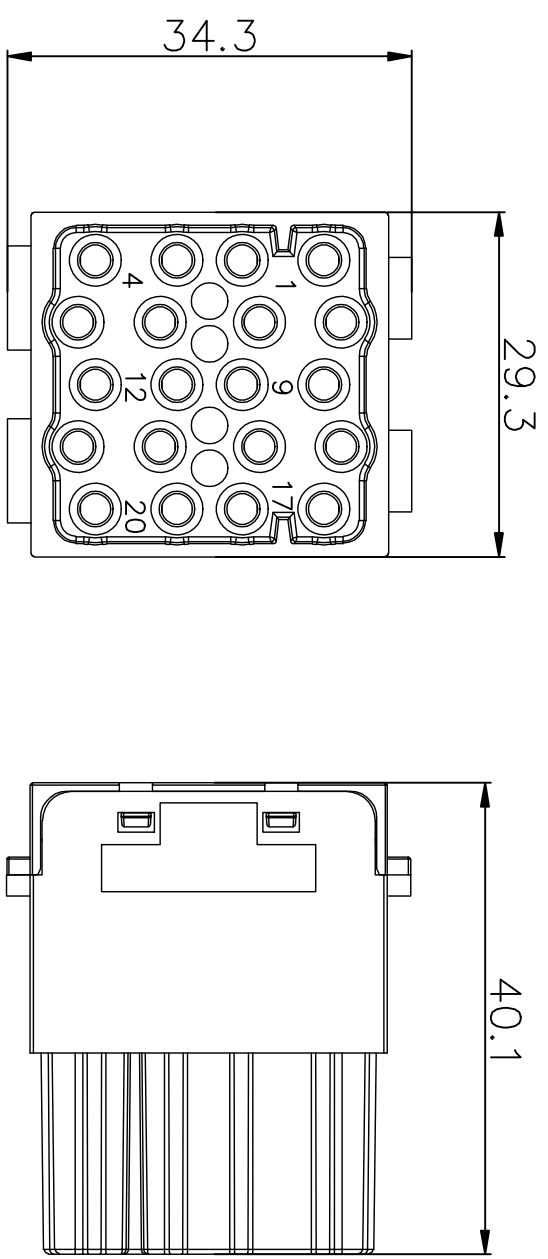

Technical characteristics:
Specifications
DIN EN 60 664-1
DIN EN 61 984

Inserts

1. Number of contacts:20
2. Rated Current:16A
3. Rated Voltage:500V
4. Pollution degree:3
5. Rated impulse voltage:6KV
6. Insulation resistance: $\geq 10^{10} \Omega$
7. Material:Polycarbonate
8. Limiting temperatures:-40℃~+125℃
9. Flammability acc. to UL94:V0
10. Mechanical working life(mating cycles): ≥ 500
11. Terminal:Crimp terminal
12. Rohs Compliance

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	2023.12.9	MM	SHEET/OF 1/1
CHK.	DATE	SCALE	1:1	A4	
APP.	DATE	NAME	UL0-HD09-H2MEE-020-FC		
 NINGBO UL0 ELECTRONICS CO.,LTD. 宁波欧路电子有限公司			DWGNO.		