



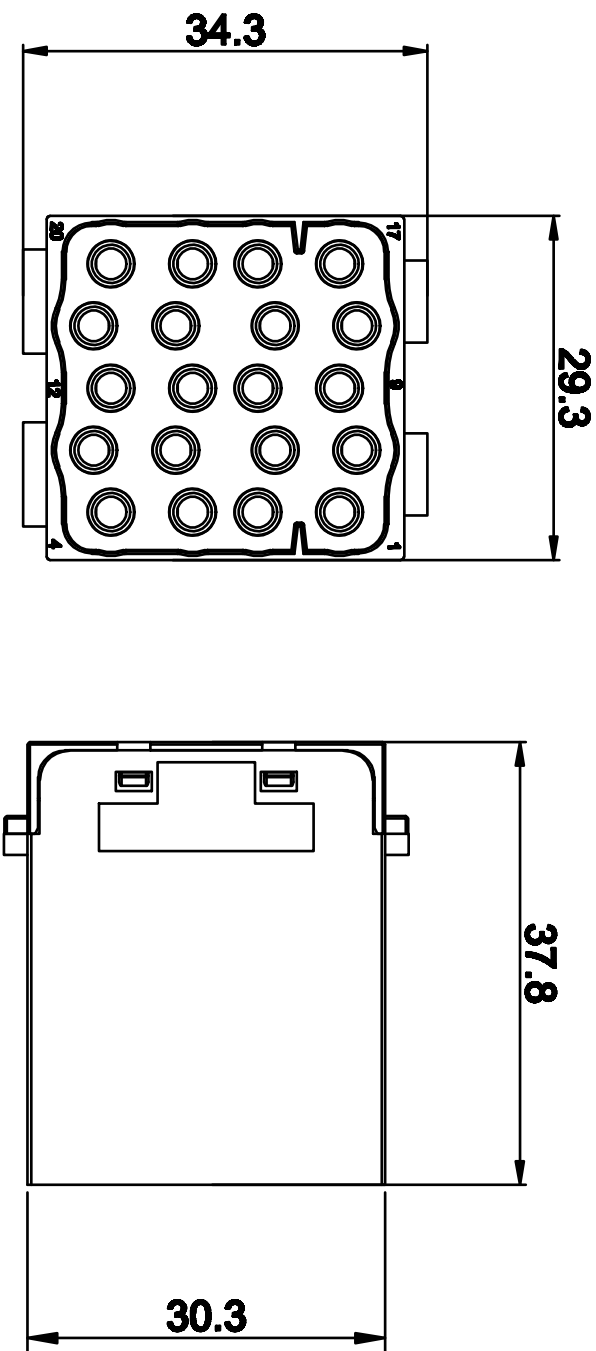

Technical characteristics:
Specifications
DIN EN 60 664-1
DIN EN 61 984

Inserts

- 1. Number of contacts:20
- 2. Rated Current:16A
- 3. Rated Voltage:500V
- 4. Pollution degree:3
- 5. Rated impulse voltage:6KV
- 6. Insulation resistance: $\geq 10^{10} \Omega$
- 7. Material:Polycarbonate
- 8. Limiting temperatures: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
- 9. Flammability acc. to UL94:V0
- 10. Mechanical working life(mating cycles) ≥ 500
- 11. Terminal:Crimp terminal
- 12. Rohs Compliance

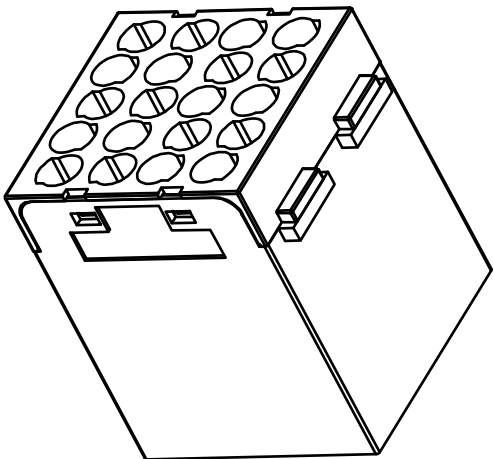

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL		NOTE
DWG.	SWL	DATE	2023.12.9	UNITS	MM	SHEET/OF 1/1
CHK.		DATE		SCALE	1:1	A4
APP.		DATE				
				NAME		
				UL0-HD09-H2MEE-020-MC		
				DWGNO.		