

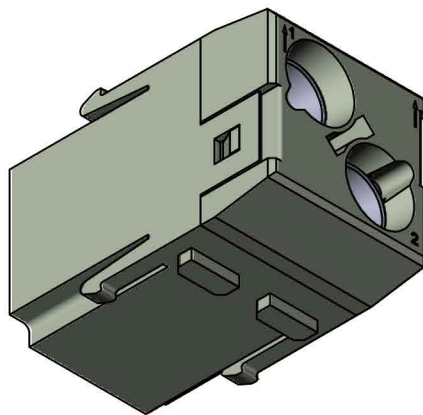
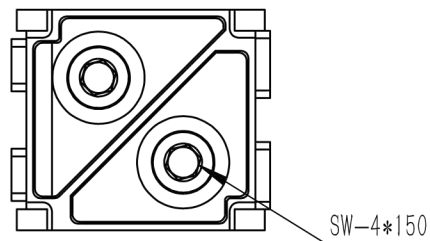


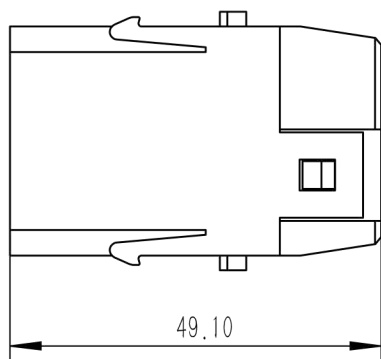

技术参数:

插芯:

- 插针数: 2
- 额定电流: 100A
- 额定电压: 1000V
- 额定脉冲电压: 8kV
- 污染等级: 3
- 依据UL的额定电压: 600V
- 绝缘阻抗:  $>10^{10}\Omega$
- 材料: 聚碳酸酯
- 颜色: RAL 7032 (浅灰色)
- 温度范围:  $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- 依据UL 94的阻燃等级: V0
- 可插拔次数:  $>500$

插针:

- 接线方式: 轴向螺栓连接
- 材料: 铜合金
- 表面处理: 镀银
- 接触电阻:  $<0.3\text{m}\Omega$
- 线径范围:  $10-35\text{mm}^2$
- 内角扳手: SW-4\*100
- 剥线长度: 13mm
- 拧紧力矩:

- $\text{mm}^2$ : 10 16 25 35
- N·m: 6 6 7 8


Technical specification:

Insters:

- No. of contact: 2
- Rated current: 100A
- Rated voltage: 1000V
- Rated impulse voltage: 8kV
- Pollution degree: 3
- Rated voltage acc.to UL: 600V
- Insulation resistance:  $>10^{10}\Omega$
- Material: polycarbonate
- Colour: RAL 7032(light grey)
- Temperature range:  $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- Flammability acc.to UL 94: V0
- Mating cycles:  $>500$

Contacts:

- Terminal: axial screw terminal
- Material: copper alloy
- Surface: hard-silver plated
- Contact resistance:  $<0.3\text{m}\Omega$
- Wire gauge:  $10-35\text{mm}^2$
- Hexagonal driver: SW-4\*100
- Stripping length: 13mm
- Tightening tourque:
  - $\text{mm}^2$ : 10 16 25 35
  - N·m: 6 6 7 8

|                                                                                                                                                     |           |          |                |
|-----------------------------------------------------------------------------------------------------------------------------------------------------|-----------|----------|----------------|
|                                                                |           |          | 订货号 Order No.  |
| 版本 REV                                                                                                                                              | 重量 weight | 比例 Scale | 产品代号 Part Code |
| V1.0                                                                                                                                                | 65.9g     | 1:1      | SO-H2MK-002-M  |
|  浙江思美克电气科技有限公司<br>ZHEJIANG SMICO ELECTRICAL TECHNOLOGY CO.,LTD |           |          |                |