

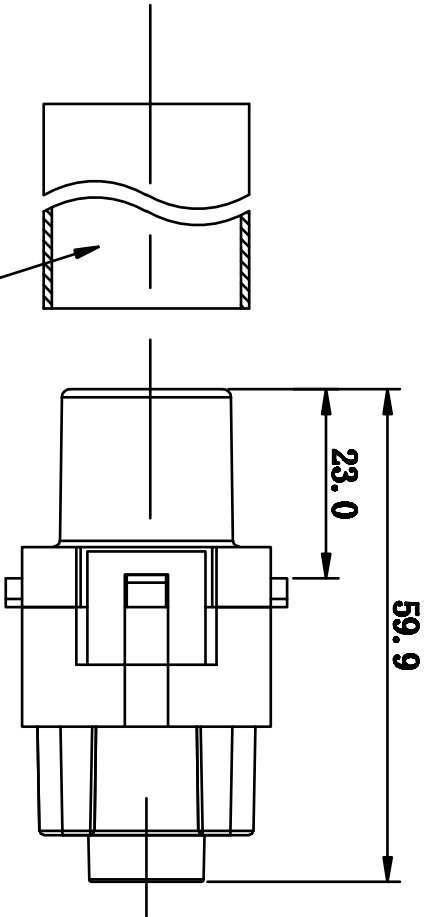


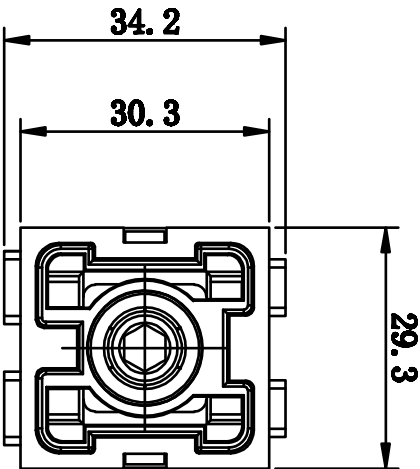


热缩管
Schrumpfschlauch



Technical characteristics:
Specifications
DIN EN 60 664-1
DIN EN 61 984

Inserts

1. Number of contacts: 1
 2. Rated Current: 200A
 3. Rated Voltage: 1000V
 4. Pollution degree: 3
 5. Rated impulse voltage: 8KV
 6. Rated voltage acc. to UL/CSA: 600V
 7. Insulation resistance: $\geq 10^9 \Omega$
 8. Material: Polycarbonate
 9. Limiting temperatures: $-40^\circ\text{C} \sim +125^\circ\text{C}$
 10. Flammability acc. to UL94: V0
 11. Mechanical working life (mating cycles): ≥ 500
 12. Terminal: Axial Screw terminal
- Contacts:
1. Material: Copper alloy
 2. Surface: hard-silver plated
 3. Contact resistance: $\leq 0.2\text{m}\Omega$
 4. Wire gauge: 25-40mm²
 5. Tightening Torque
mm² 25 35 50 70
Nm 8 8 9 10
 6. Stripping length: 16mm
 7. Rohs Compliance

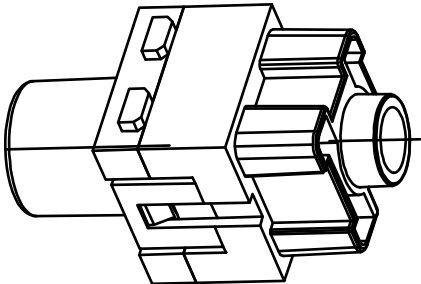

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	2023.12.9	MM	SHEET/OF 1/1
CHK.	DATE			SCALE 1:1	A4
APP.	DATE			NAME	UL0-HD09-H2MK-001.1-F (25-40mm²)
NINGBO UL0 ELECTRONICS CO.,LTD. 宁波欧路电子有限公司					DWGNO.