



Technical characteristics:
Specifications
DIN EN 60 664-1
DIN EN 61 984

Inserts

- 1. Number of contacts: 1
 - 2. Rated Current: 200A
 - 3. Rated Voltage: 1000V
 - 4. Pollution degree: 3
 - 5. Rated impulse voltage: 8KV
 - 6. Rated voltage acc. to UL/CSA: 600V
 - 7. Insulation resistance: $\geq 10^{10} \Omega$
 - 8. Material: Polycarbonate
 - 9. Limiting temperatures: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
 - 10. Flammability acc. to UL94: V0
 - 11. Mechanical working life (mating cycles): ≥ 500
 - 12. Terminal: Axial Screw terminal
- Contacts:
- 1. Material: Copper alloy
 - 2. Surface: hard-silver plated
 - 3. Contact resistance: $\leq 0.2\text{m}\Omega$
 - 4. Wire gauge: 40-70mm²
 - 5. Tightening Torque
Nm 8 8 9 10
 - 6. Stripping length: 16mm
 - 7. Rohs Compliance

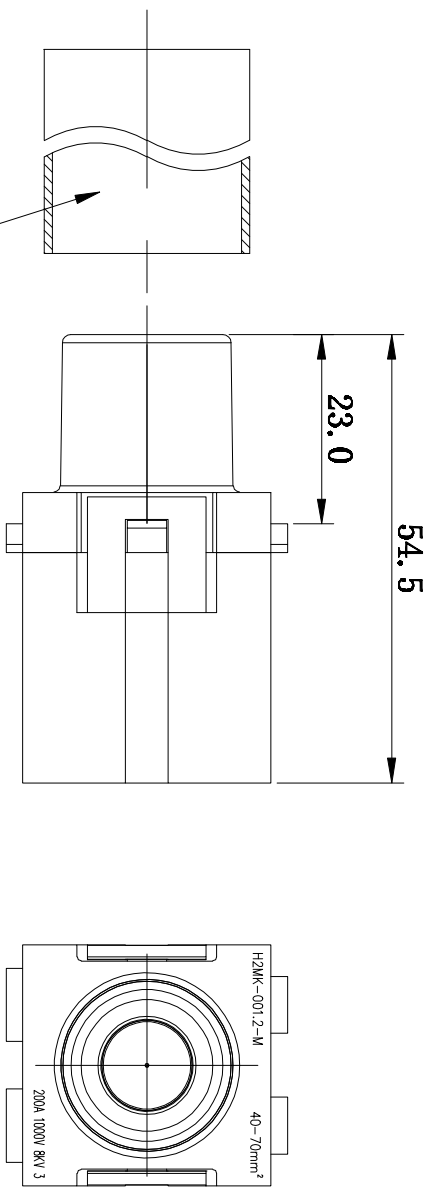

热缩管
Schrumpfschlauch

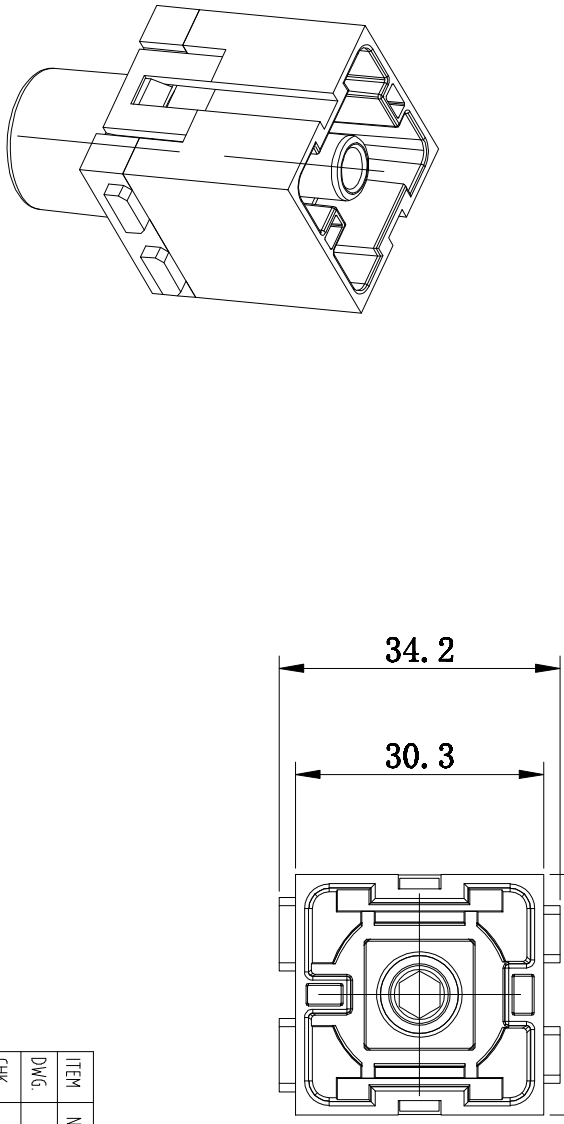

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	2023.12.9	MM	SHEET/OF 1/1
CHK.	DATE	DATE		SCALE	1:1
APP.	DATE	DATE		NAME	UL0-HD09-H2MK-001.2-M (40-70mm²)

NINGBO UL0 ELECTRONICS CO.,LTD.
宁波欧路电子有限公司

DWGNO.