



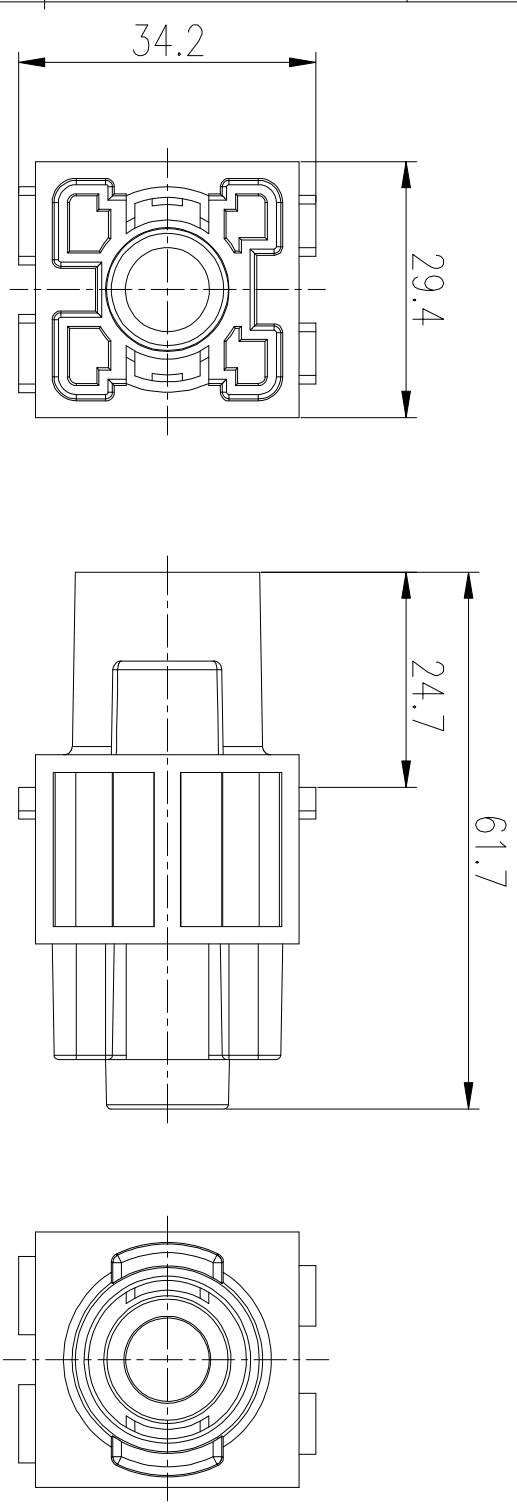

Technical characteristics:
Specifications
DIN EN 60 664-1
DIN EN 61 984

- Inserts
- 1. Number of contacts: 1
 - 2. Rated Current: 200A
 - 3. Rated Voltage: 1000V
 - 4. Pollution degree: 3
 - 5. Rated impulse voltage: 8KV
 - 6. Insulation resistance: $\geq 10^{10} \Omega$
 - 7. Material: Polycarbonate
 - 8. Limiting temperatures: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
 - 9. Flammability acc. to UL94: V0
 - 10. Mechanical working life (mating cycles): ≥ 500
 - 11. Terminal: Crimp terminal
 - 12. Rohs Compliance

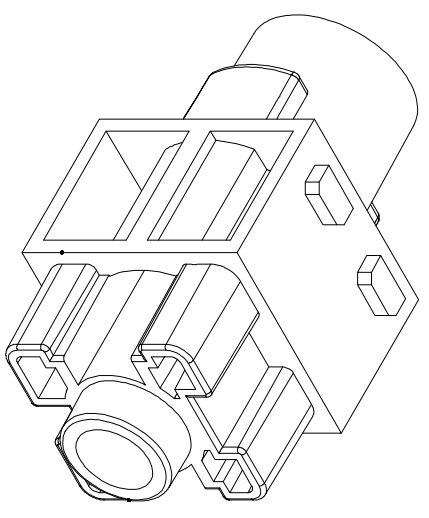

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	2023.12.9	MM	SHEET/OF 1/1
CHK.	DATE			SCALE	1:1
APP.	DATE				A4
				NAME	UL0-HD09-H2MK-001-FC
				DWGNO.	



NINGBO ULO ELECTRONICS CO.,LTD.
宁波欧路电子有限公司