
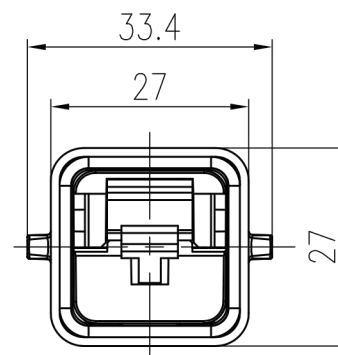


1 2 3 4 5 6


A

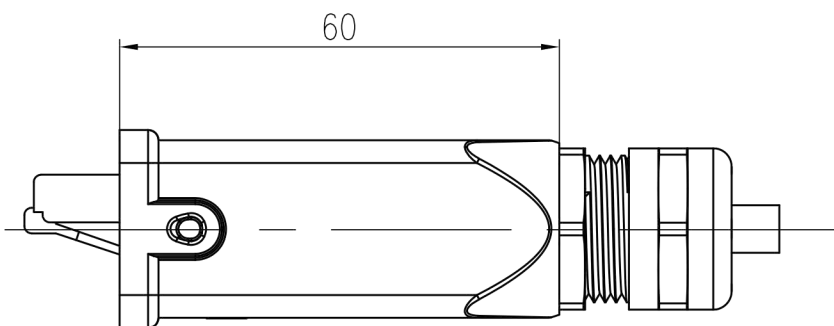

技术参数:

- 插针数: 8
- 传输特性: 超5类网线可达100MHZ
依据ISO/IEC 11 801: 2002
EN 50 173-1
- 传输速率:10/100Mbit/s, 1Gbit/s
- 屏蔽: 360度全屏蔽接触
- 电线终端: 通过刺穿触头
- 工作温度范围: -40℃ - +70℃
- 材料: 锌合金RAL7037
- 防护等级: IP65
- 插拔次数: ≥500

B

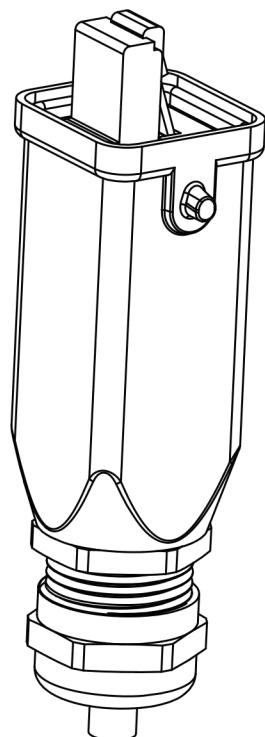

Technical specification:

- Number of contacts: 8
- Transmission performance: **Category 5e / Class D, up to 100MHz**
acc. to ISO/IEC11 801:2002, EN 50 173-1
- Transmission rate: **10Mbit/s, 100Mbit/s and 1Gbit/s**
- Shielding: fully shielded,360°
- Cable termination: with piercing
- Limiting temperatures: -40°C...+70°C
- Hoods material: Zinc alloy,SprayingRAL7037
- Degree of protection: IP65

			订货号 Order No.
版本 REV	重量 weight	比例 Scale	产品代号 Part Code
V1.0		1:1	SO-H3A-TK-2B-M20-RJ45/M
浙江思美克电气科技有限公司 ZHEJIANG SMICO ELECTRICAL TECHNOLOGY CO.,LTD			

1 2 3 4 5 6